


Fine Pitch LED Screen

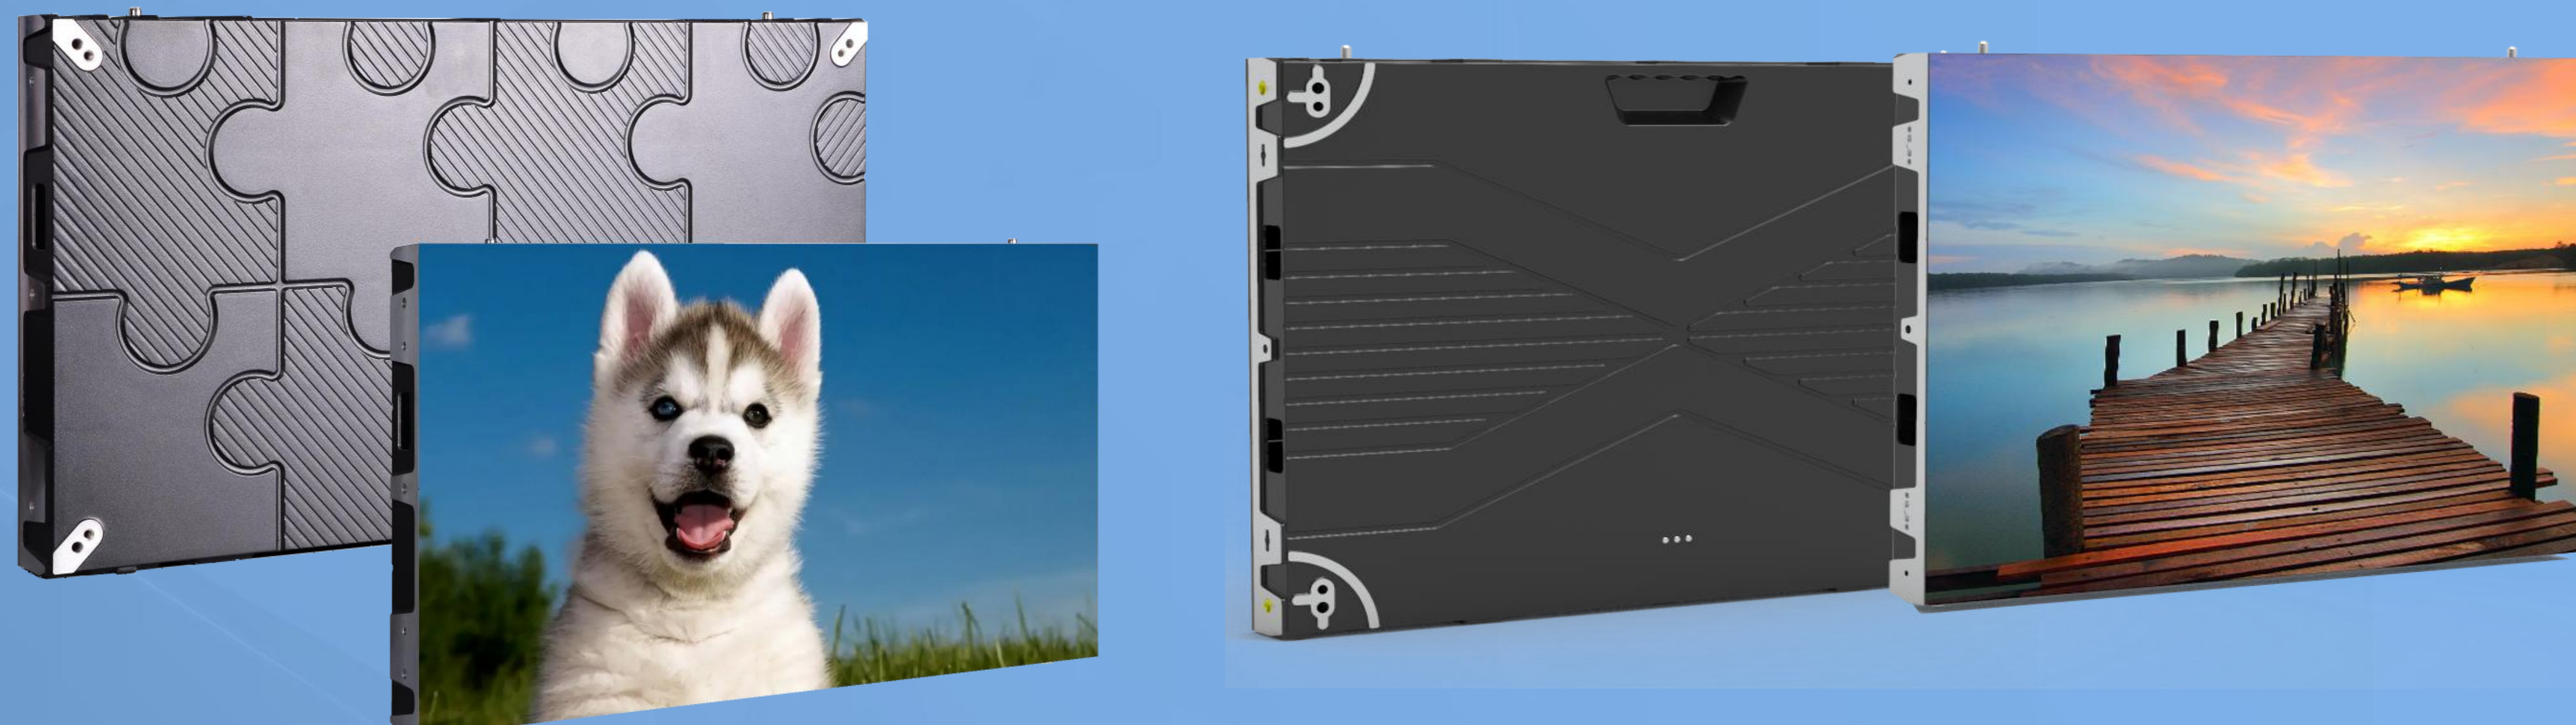

TECHNICAL SPECIFICATIONS:

Pixel pitch (mm)	1.25	1.56	1.87
	1.25	1.53	1.86
Cabinet size (WxH)mm	600*337.5		
	640*480		
Cabinet material	Die-casting aluminum		
Pixelc onfiguration	1R1G1B	1R1G1B	1R1G1B
Led lamp	SMD1010/GOB /COB1010	SMD1212/GOB1212 /COB1212	SMD1515/GOB1515 /COB1515
Pixel density (dot/m ²)	640000	409600	284444
	640000	427186	288888
Module size (WxH)mm	300*168.75		
	320*160		
Scan mode	1/45	1/48	1/30
	1/64	1/52	1/43
Gray scale (bit)	14		
Protection level	IP43		
Maintenance	Front maintenance		
Brightness (nit)	700-900		
Viewing angle (H/V)	≥160/≥140°		
Contrast ratio	≥6000:1		
Refresh ratio	3840Hz		
Input power (AC)	110V—220V		
Max.Power consumption (W/m ²)	≤450		
Ave.Power consumption (W/m ²)	≤150		
Working temperature	-20°C~+80°C		
Warranty	2 years		

PRODUCT FEATURES:

- 600mm*337.5mm and 640mm*480mm cabinets for choosing.
- SMD /GOB / COB surface technology is optional, protect leds from collision and corrosion.
- Magnetic led module, front and fast maintenance by vacuum maintenance tool.
- Front installation, convenient and space saving.
- Die-casting aluminum cabinet, side and top locks ensuring cabinet surface seamless and flatness after installation.
- Cable free design makes cabinet neat and clean.
- 5.8kg/6.8kg/cabinet, super lightweight.
- Position pins make cabinet installation alignment, precise and quick.
- High gray scale, high refresh rate, high contrast ratio.
- Products is broadly used for conference, control center, TV brocasting, etc.

CASE PICTURES:

