


FLEXIBLE MESH LED SCREEN

We aim at extending the vision of creating unique experience for your architectures and large events. To provide the top quality flexible mesh display makes your media mesh solution perfectly.

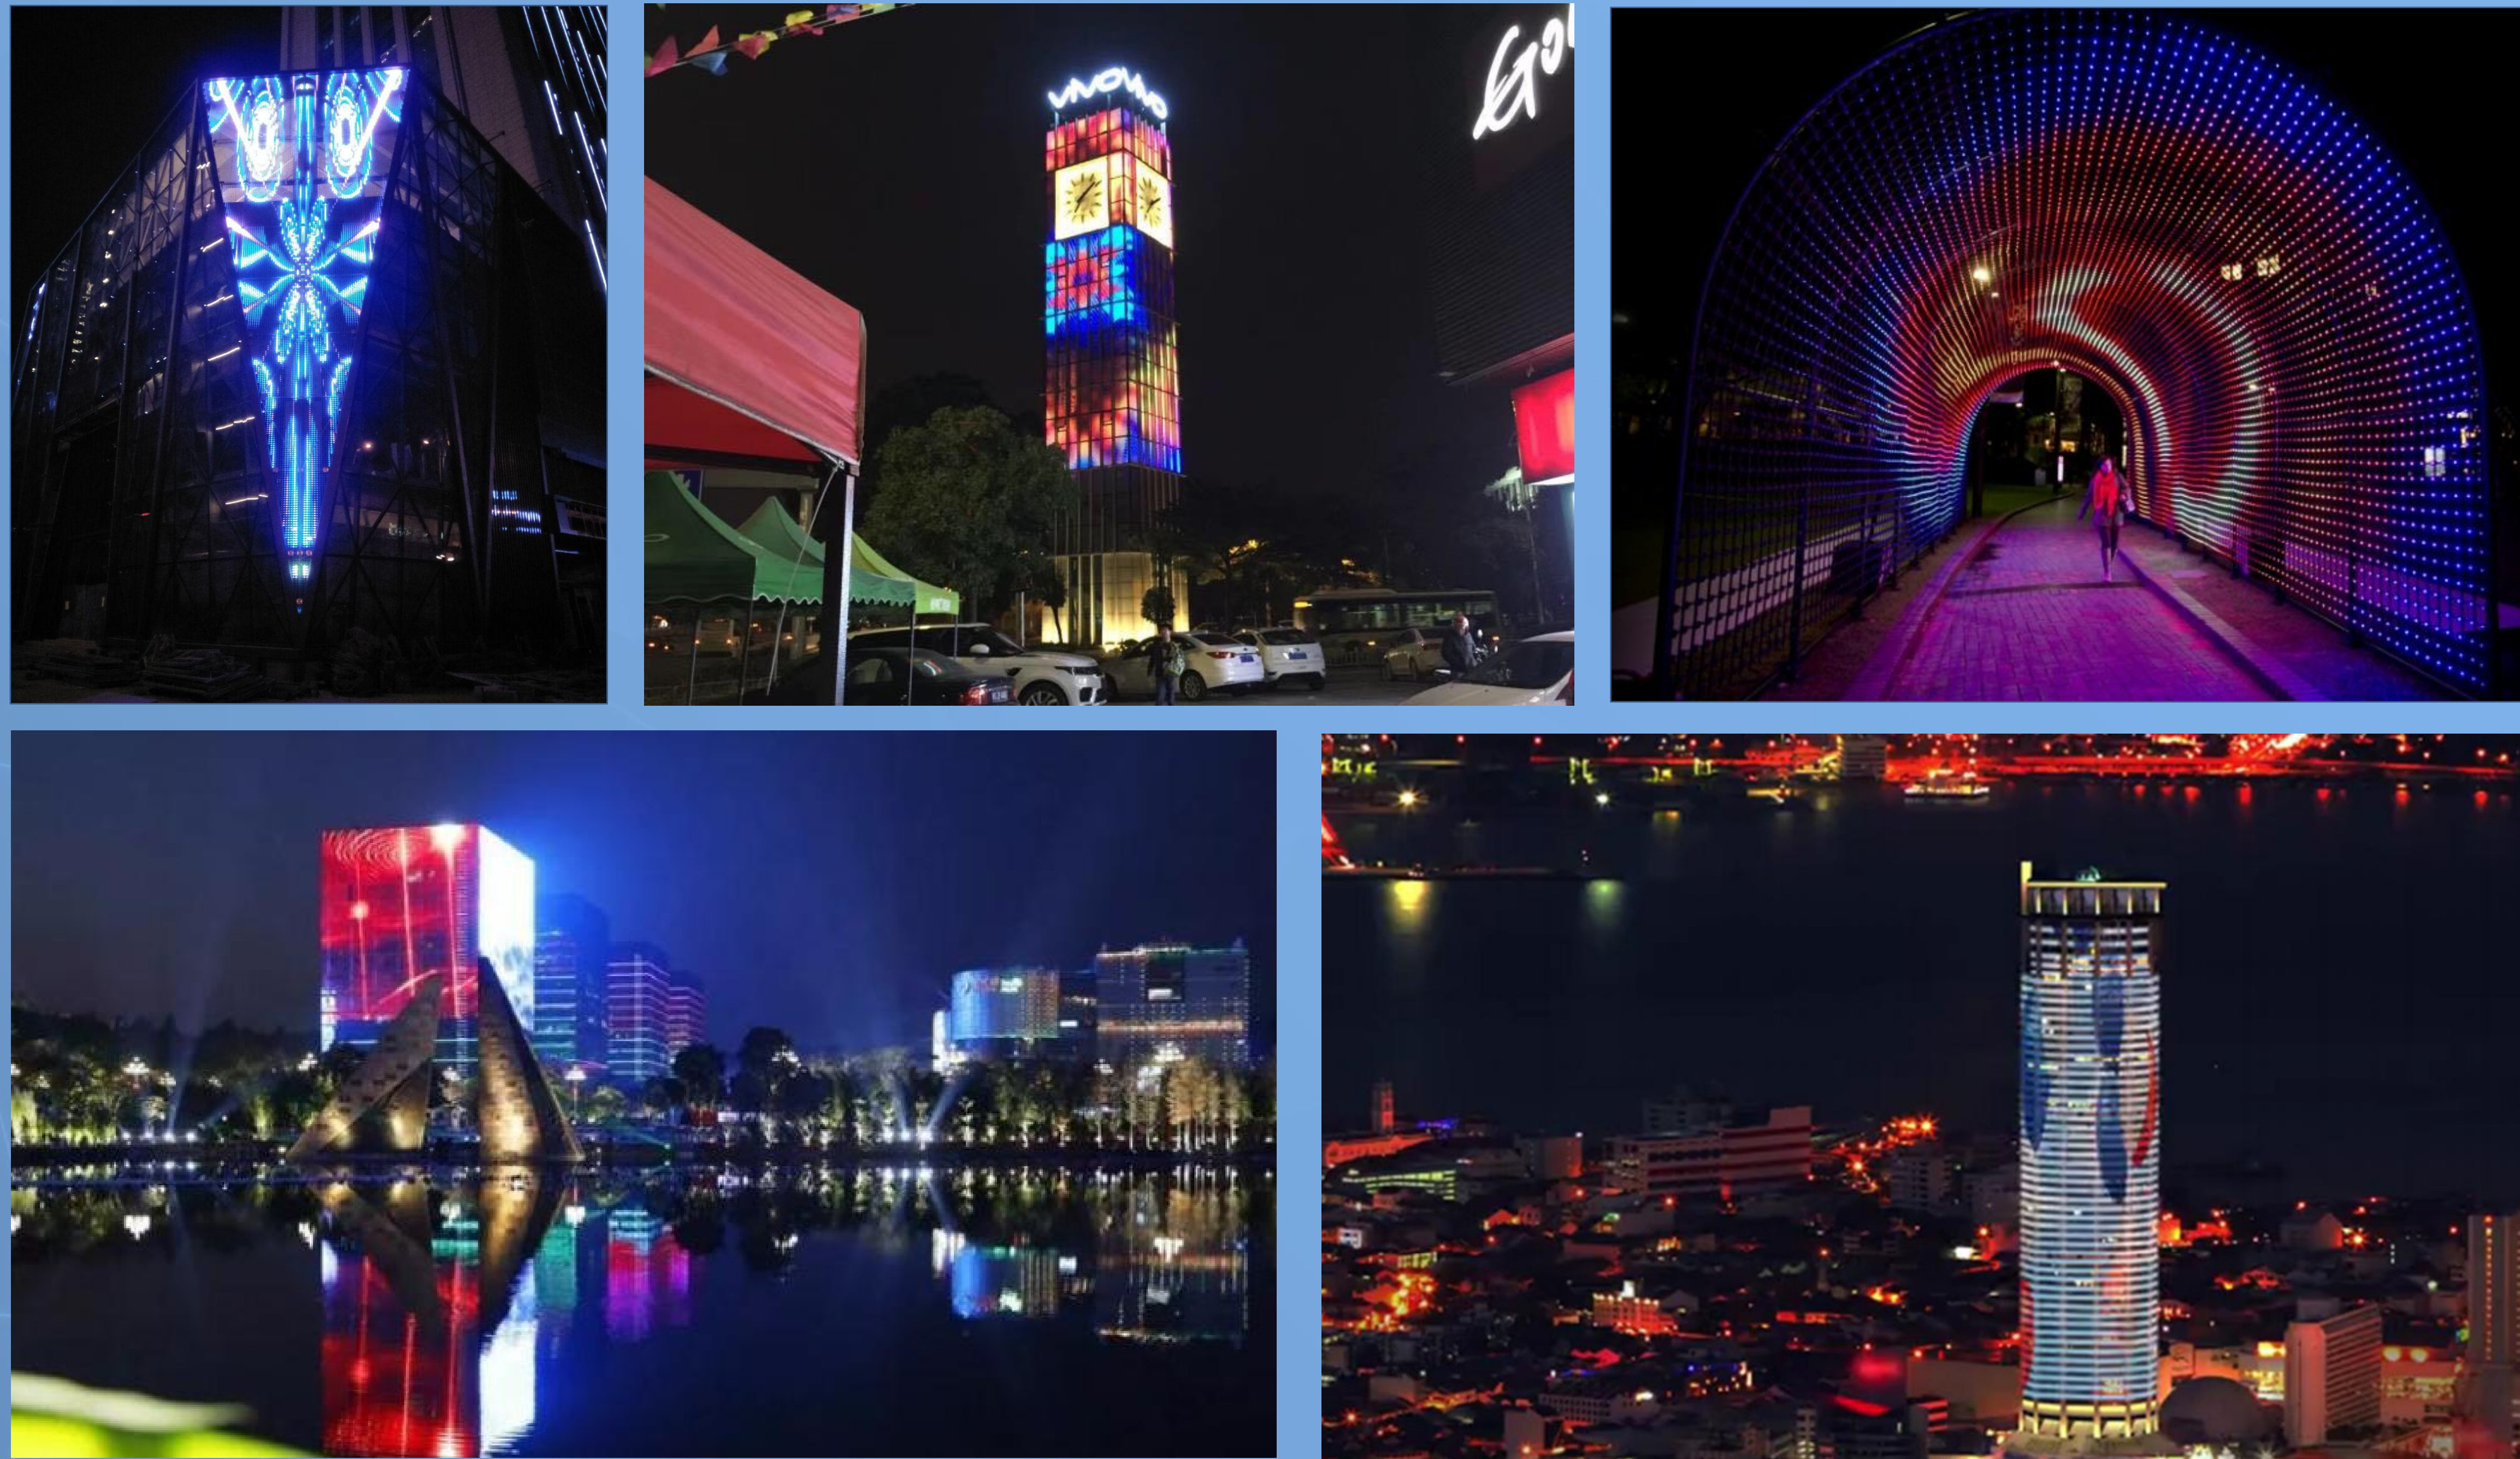

TECHNICAL SPECIFICATIONS:


Pixel Pitch (mm)	P37	P56	P75	P100	P150
Pixel Configuration	SMD 3 in 1				
Panel Size(mm)	300*4800	450*7200	600*9600	800*12800	1500*19200
Panel Resolution	8*128dots				
Weight (kg/sqm)	1.8~10.5				
Brightness (nit)	500-6800				
IP Rating	IP43 / IP65				
Refresh Rate (Hz)	> 1000				
Transparency Rate	55%-95%				
Scan Mode	Static				
Max. Power Consumption	50W/sqm-800W/sqm				
Color Processing	16 bit				
Viewing Angle (H/V)	140° / 110°				
Operating Temperature	-20~60° C				
Main Power Source	AC 100~240V; 50/60Hz				
Input Voltage	15V-24 DC				
Humidity	10~90%RH				
Life Time	>100,000 Hours				

Remark: larger pixel pitch such as P300 and P400 can be customized accordingly, please contact sales department for details.

PRODUCT FEATURES :

High Transparency

High transparency maximizes the natural light get inside of building, also ensuring the screen has great ventilation and wind-resistance.

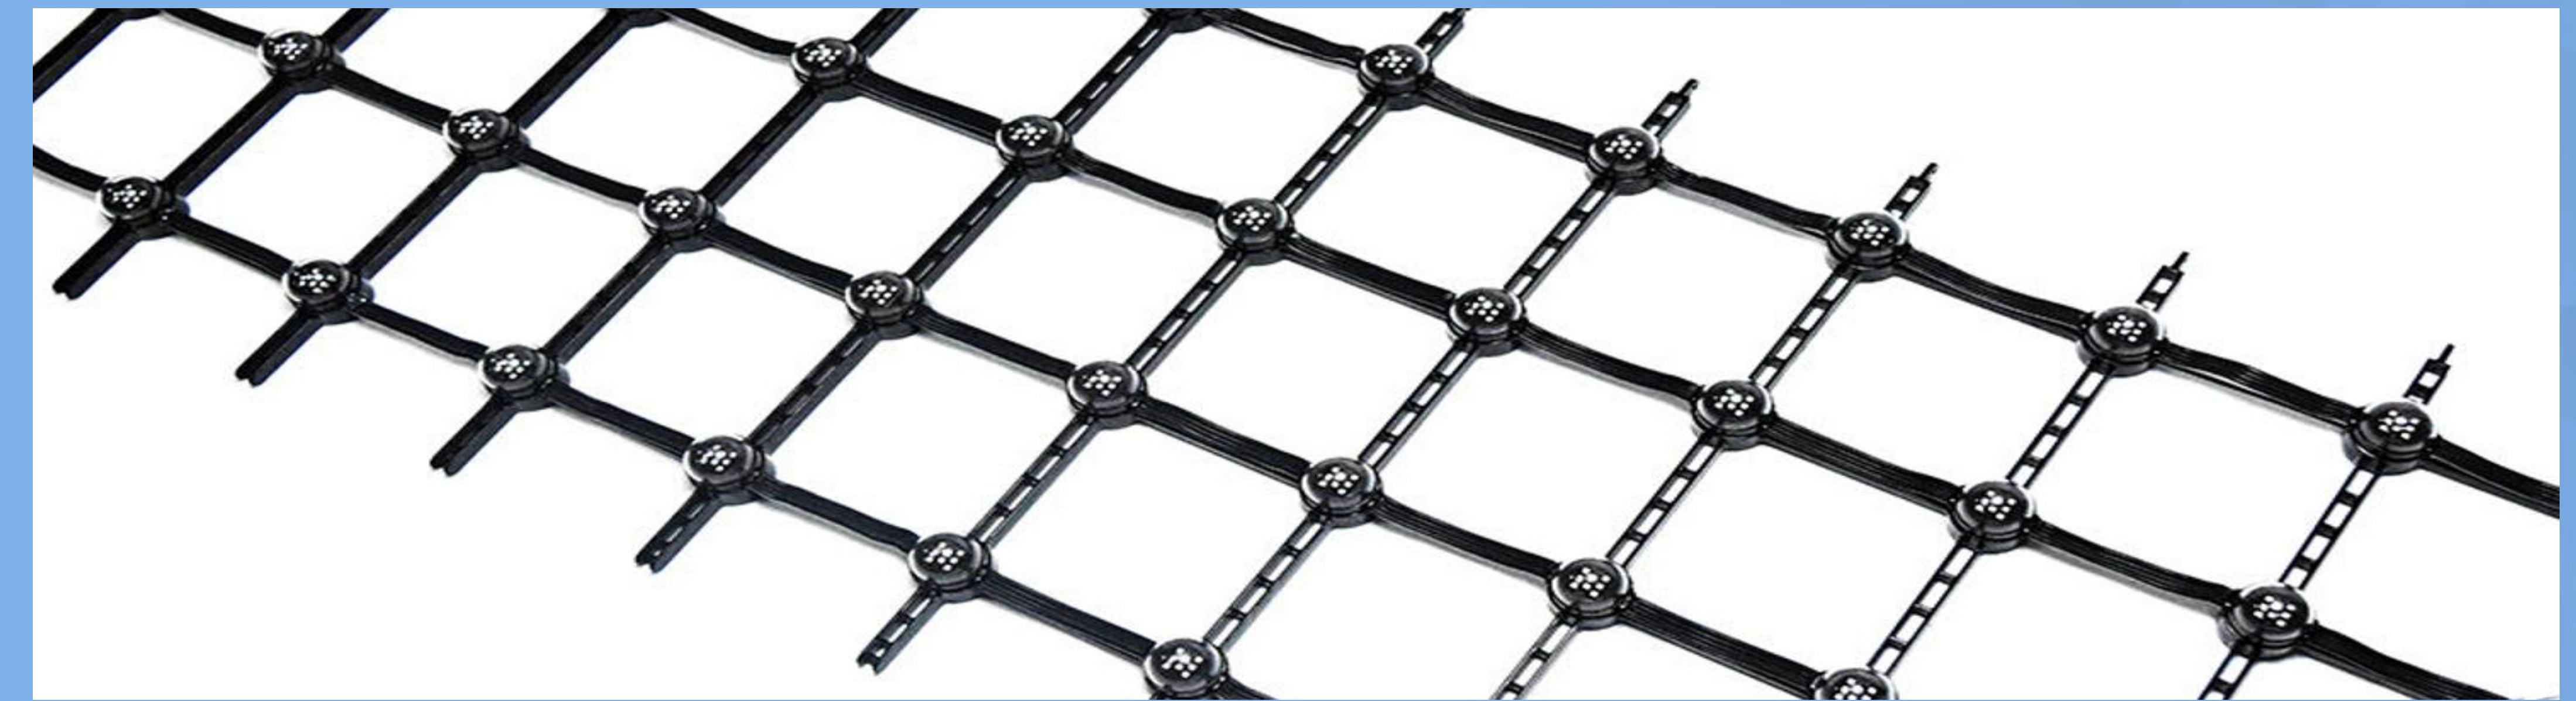


Ultra Flexible

Ultra flexible, easy to form a flat or a curved screen to match with irregular shaped building facade, panel size and panel color can be customized.



Fast Inter-panel Locks

Fast inter-panel locks ensures installation quick and easy especially for a large-sized screen. Tool free panel connection, labor cost saving.

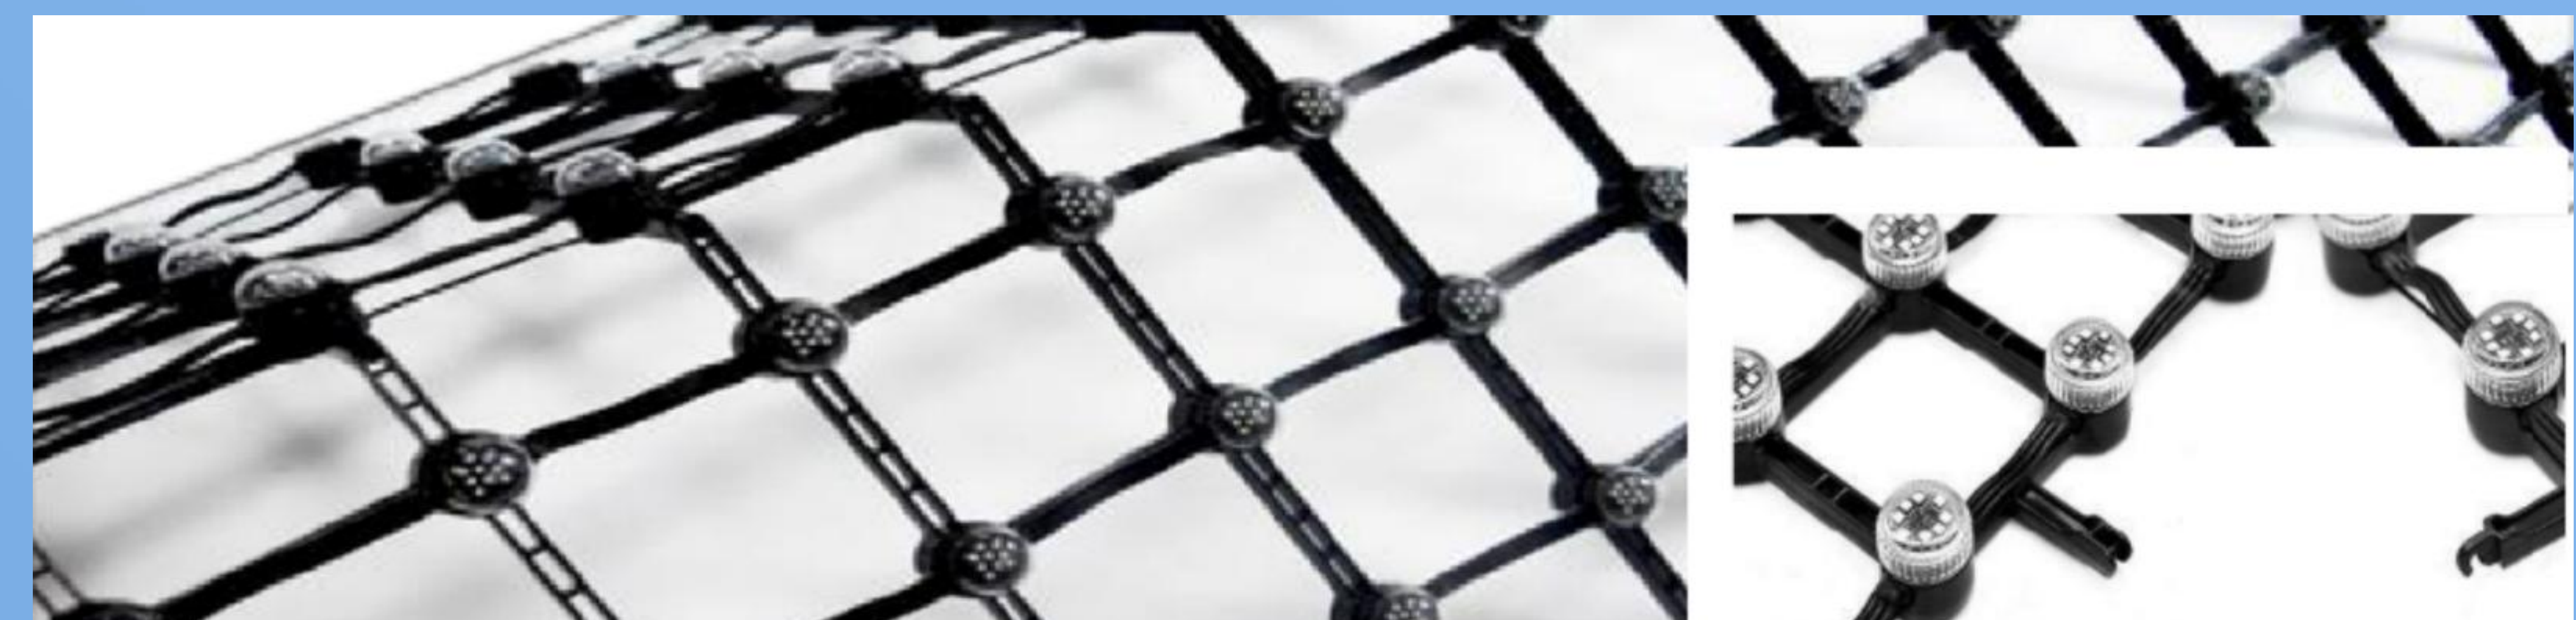

Single LED Strips and Dots

Both single LED strips and LED dot can be taken out for repair or replacement, which makes after-sales service much more convenient.

