

Transparent LED Screen



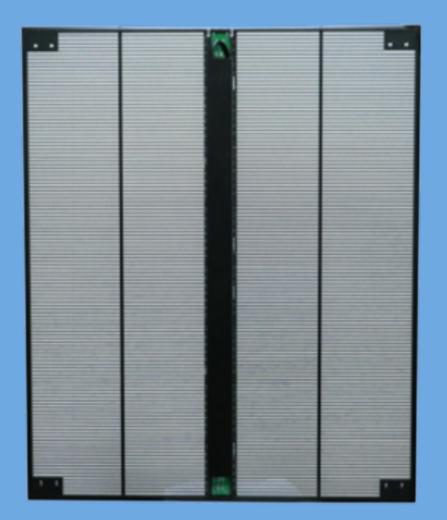

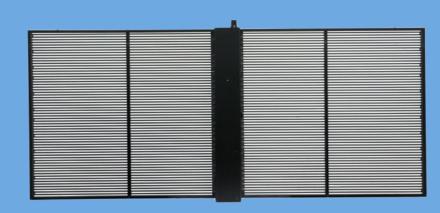

PRODUCT FEATURES:

- Multi cabinet designs for different installations and applications. Frameless cabinet for store window, it makes window more elegant and increases transparency. Die-casting aluminum cabinet is suitable for rental. 1000mm*1000mm big cabinet ensures installation easier and fast, reduces goods cost as well. Silver color cabinet is available.
- Brightness: 800nit-5000nit to match indoor and facing outdoor installation.
- Different pixel pitch for choosing: From P2.6mm to P15.6mm.
- All led lamps applied Nationstar lamp, it enhances product quality and reliability.
- Product in stock for quick delivery. We prepared P2.5-5.2 and P3.9-7.8 in stock all year for quick delivery.

APPLICATION:

Glass video wall Stage event background Shopping mall advertising screen

Inpu

CASES



TECHNICAL SPECIFICATIONS

| Pixel pitch (mm) | 2.6-5.2 | 2.84-5.62 | 3.9-7.8 | 7.8 | 10.4 | 15.6 |
|---------------------------------------|------------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Pixel configuration | SMD1921 SMD1920 | SMD1921 SMD2020 | SMD1921 SMD2020 | SMD1921 SMD2020 | SMD1921 SMD2020 | SMD3535 SMD2727 |
| ixel Density (Pixels/m ²) | 73728 | 61952 | 32768 | 16384 | 9216 | 4096 |
| Brightness (nit) | ≥5000 | ≥5000 | ≥4500 ≥800 | ≥5000 ≥1200 | ≥5000 | ≥5000 |
| | ≥1500 | ≥1500 | | | ≥1200 | ≥3500 |
| Cabinet size (mm) | 1000*500 /1000*1000 | | | | | |
| Module size (mm) | 500*125 | | | | | |
| Weight (kg/m ²) | ≤15 | | | | | |
| Cabinet material | Steel / Die-casting Aluminum | | | | | |
| Refresh rate (Hz) | 1920-3840 | | | | | |
| Input voltage (V) | 110-240 | | | | | |
| ut power prequency (Hz) | 50/60 | | | | | |
| /lax input powe (W/m²) | 800 | | | | | |
| Lifespan (H) | 50000 | | | | | |
| Storage temperature | -20° C - 60° C | | | | | |
| Warranty | 2 Years | | | | | |
| | | | | | | |