

Mechanical Rotated LED Display-R33





TECHNICAL SPECIFICATIONS:

| | | |
|---------------------------|---|-------------------------|
| Pixel Pitch | P3 | |
| Display Layers & faces | 3*3 | |
| LED module | 240*120mm (soft module) | 320*160mm (flat module) |
| The smallest display unit | 960*600mm | 960*640mm |
| Full display size | 2880*1800mm | 2880*1920mm |
| Resolution | 960*600dot | 936*624dot |
| Outer size | 2900*1000mm (H*W) | |
| Contrast | 3000:1 | |
| Brightness | 1000nit | |
| Power consumption | 4.5KW/1.5KW(Max/AVE) | |
| Weight | 1070kg | |
| Refresh rate | 3840Hz | |
| IP level | IP30 | |
| Product Color | Black | |
| Control Method | Remote App | |
| Rotate mode | 8 modes from positive and negative rotation, cross, semi-synchronous, synchronous | |
| Rotate speed | Customized | |
| Menu language | Chinese/English (Multiple language support) | |
| Warranty | 2 Years | |

PRODUCT FEATURES:

- Mobile phone APP smart control to manage play list and content.
- 3 layers 3 faces display, multi type rotation modes.
- Noise-free moto driving, quiet movement .
- Modular design part, friendly installation.
- Synchronous videos and picture automatically fit the rotation.
- Broadly use in super market, store, club, subway, hotel, train and bus station, airport, etc.

PRODUCT PICTURES:

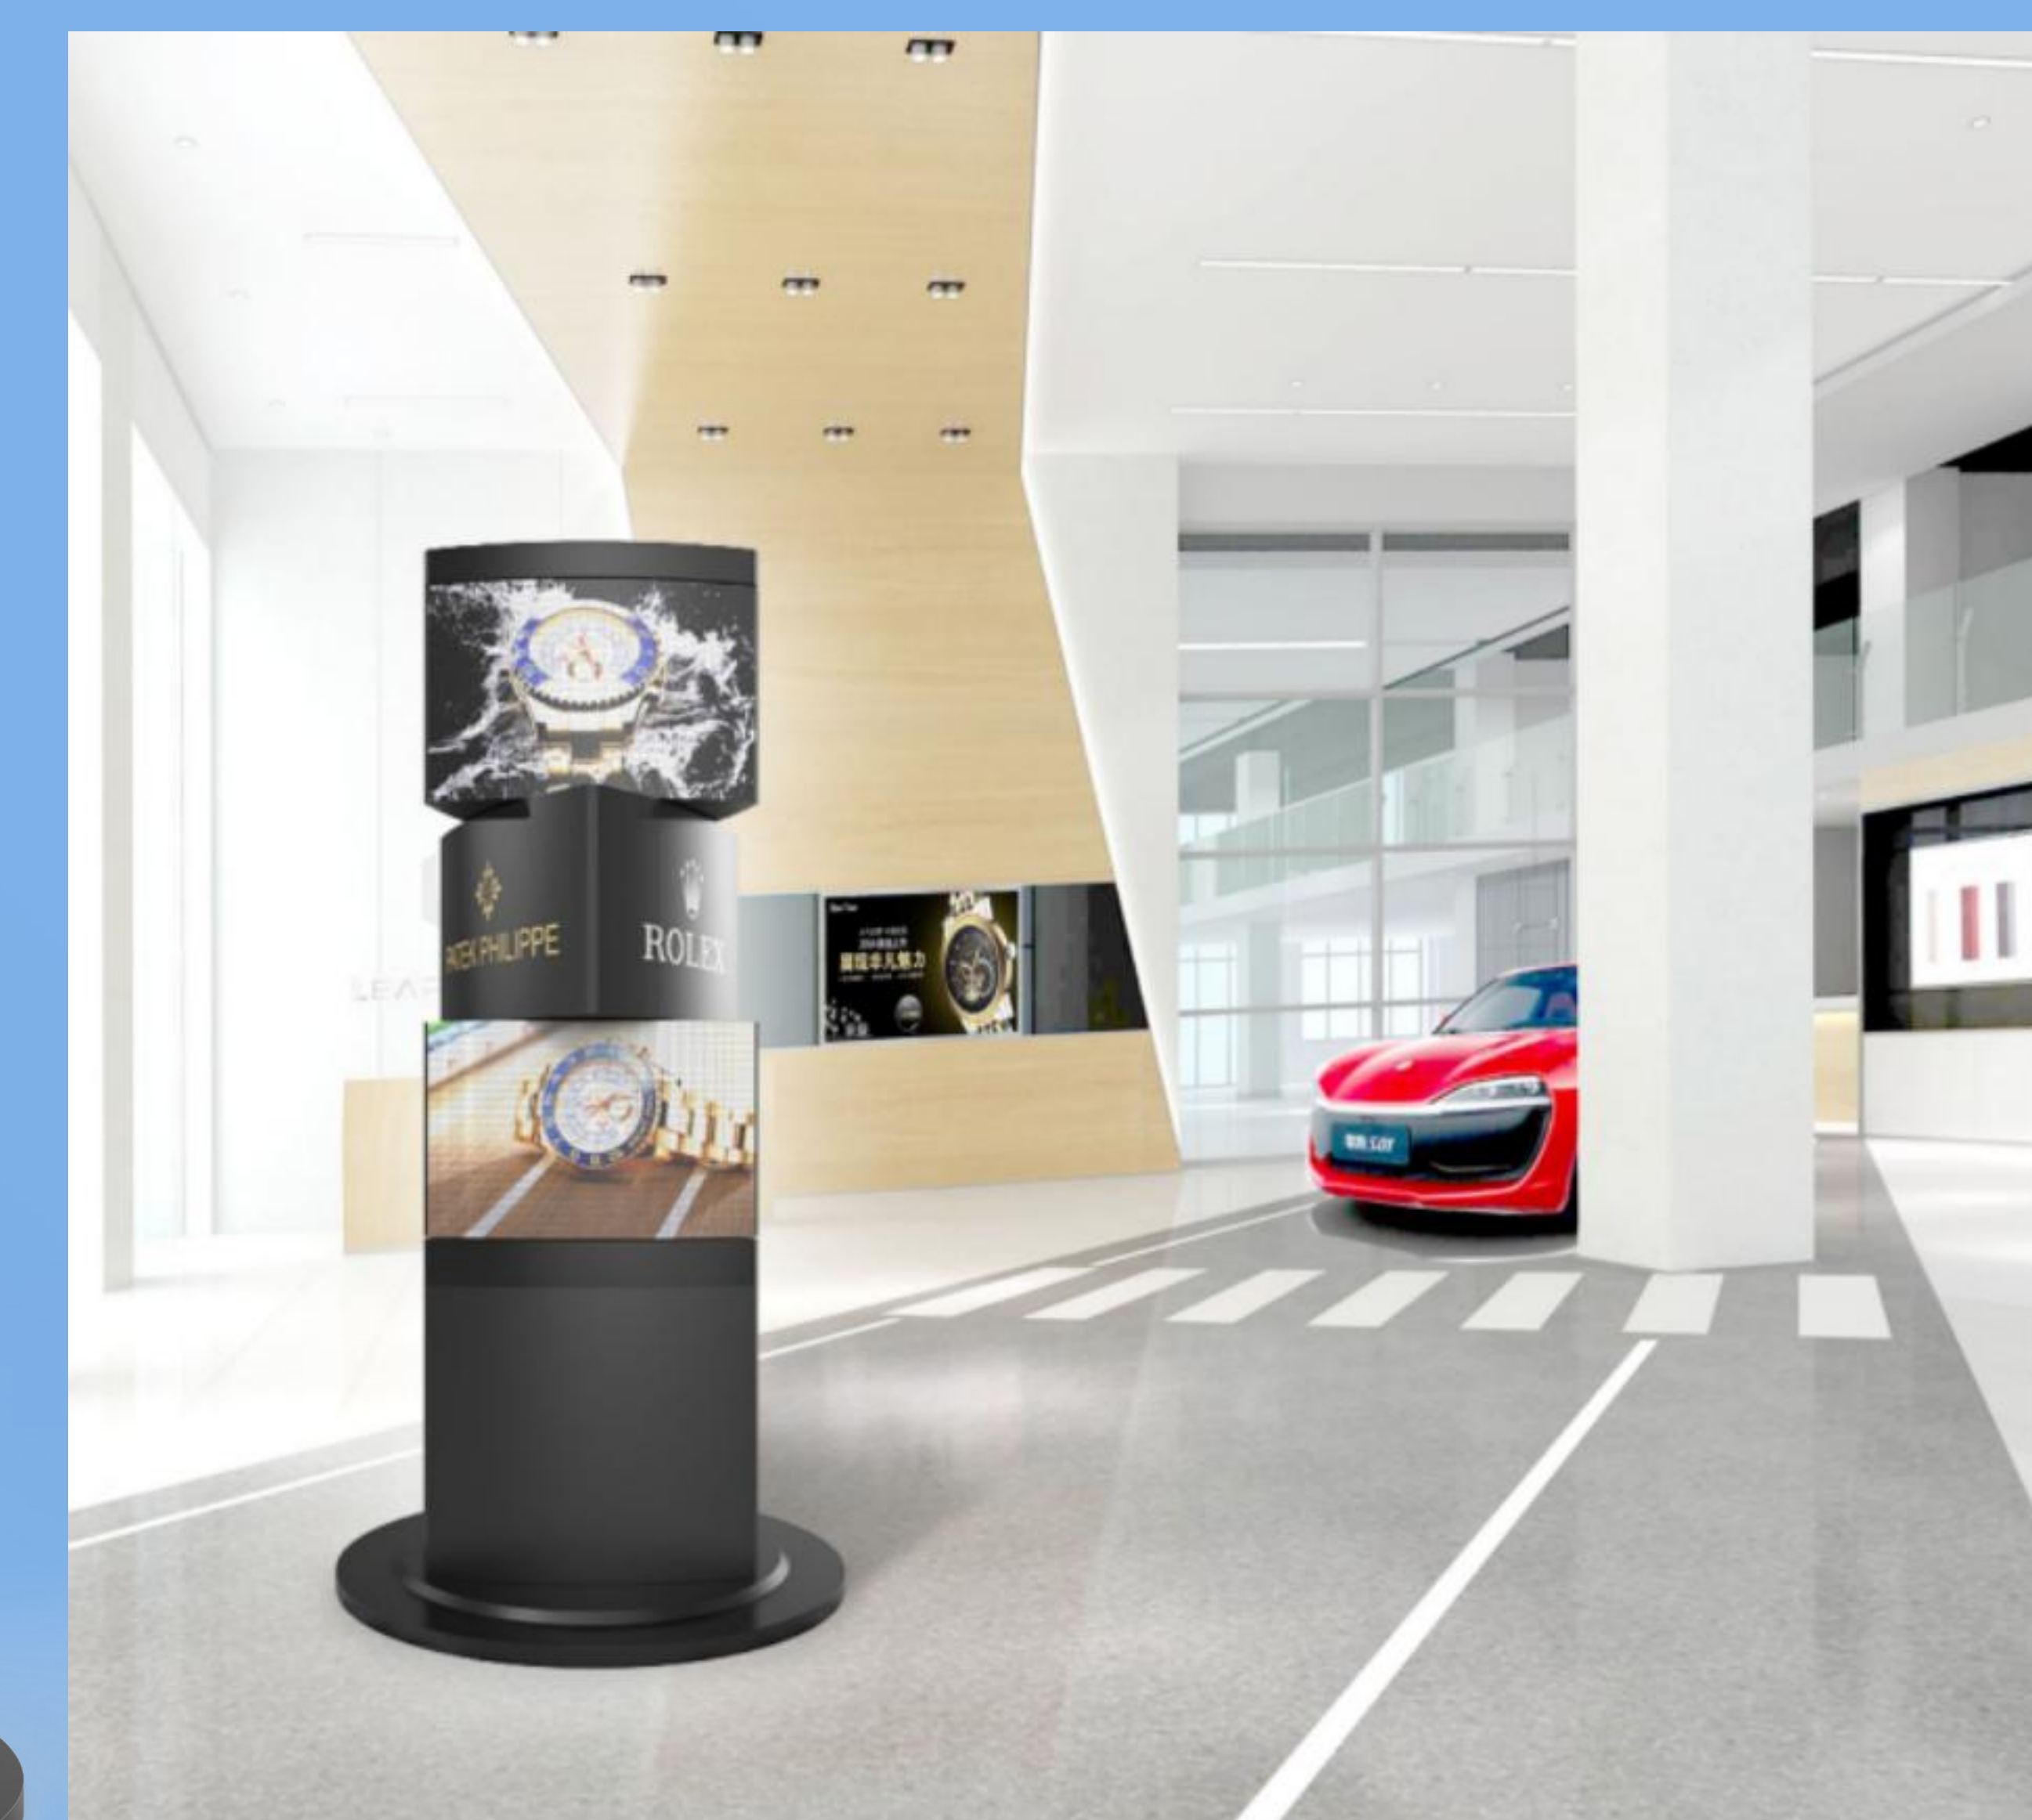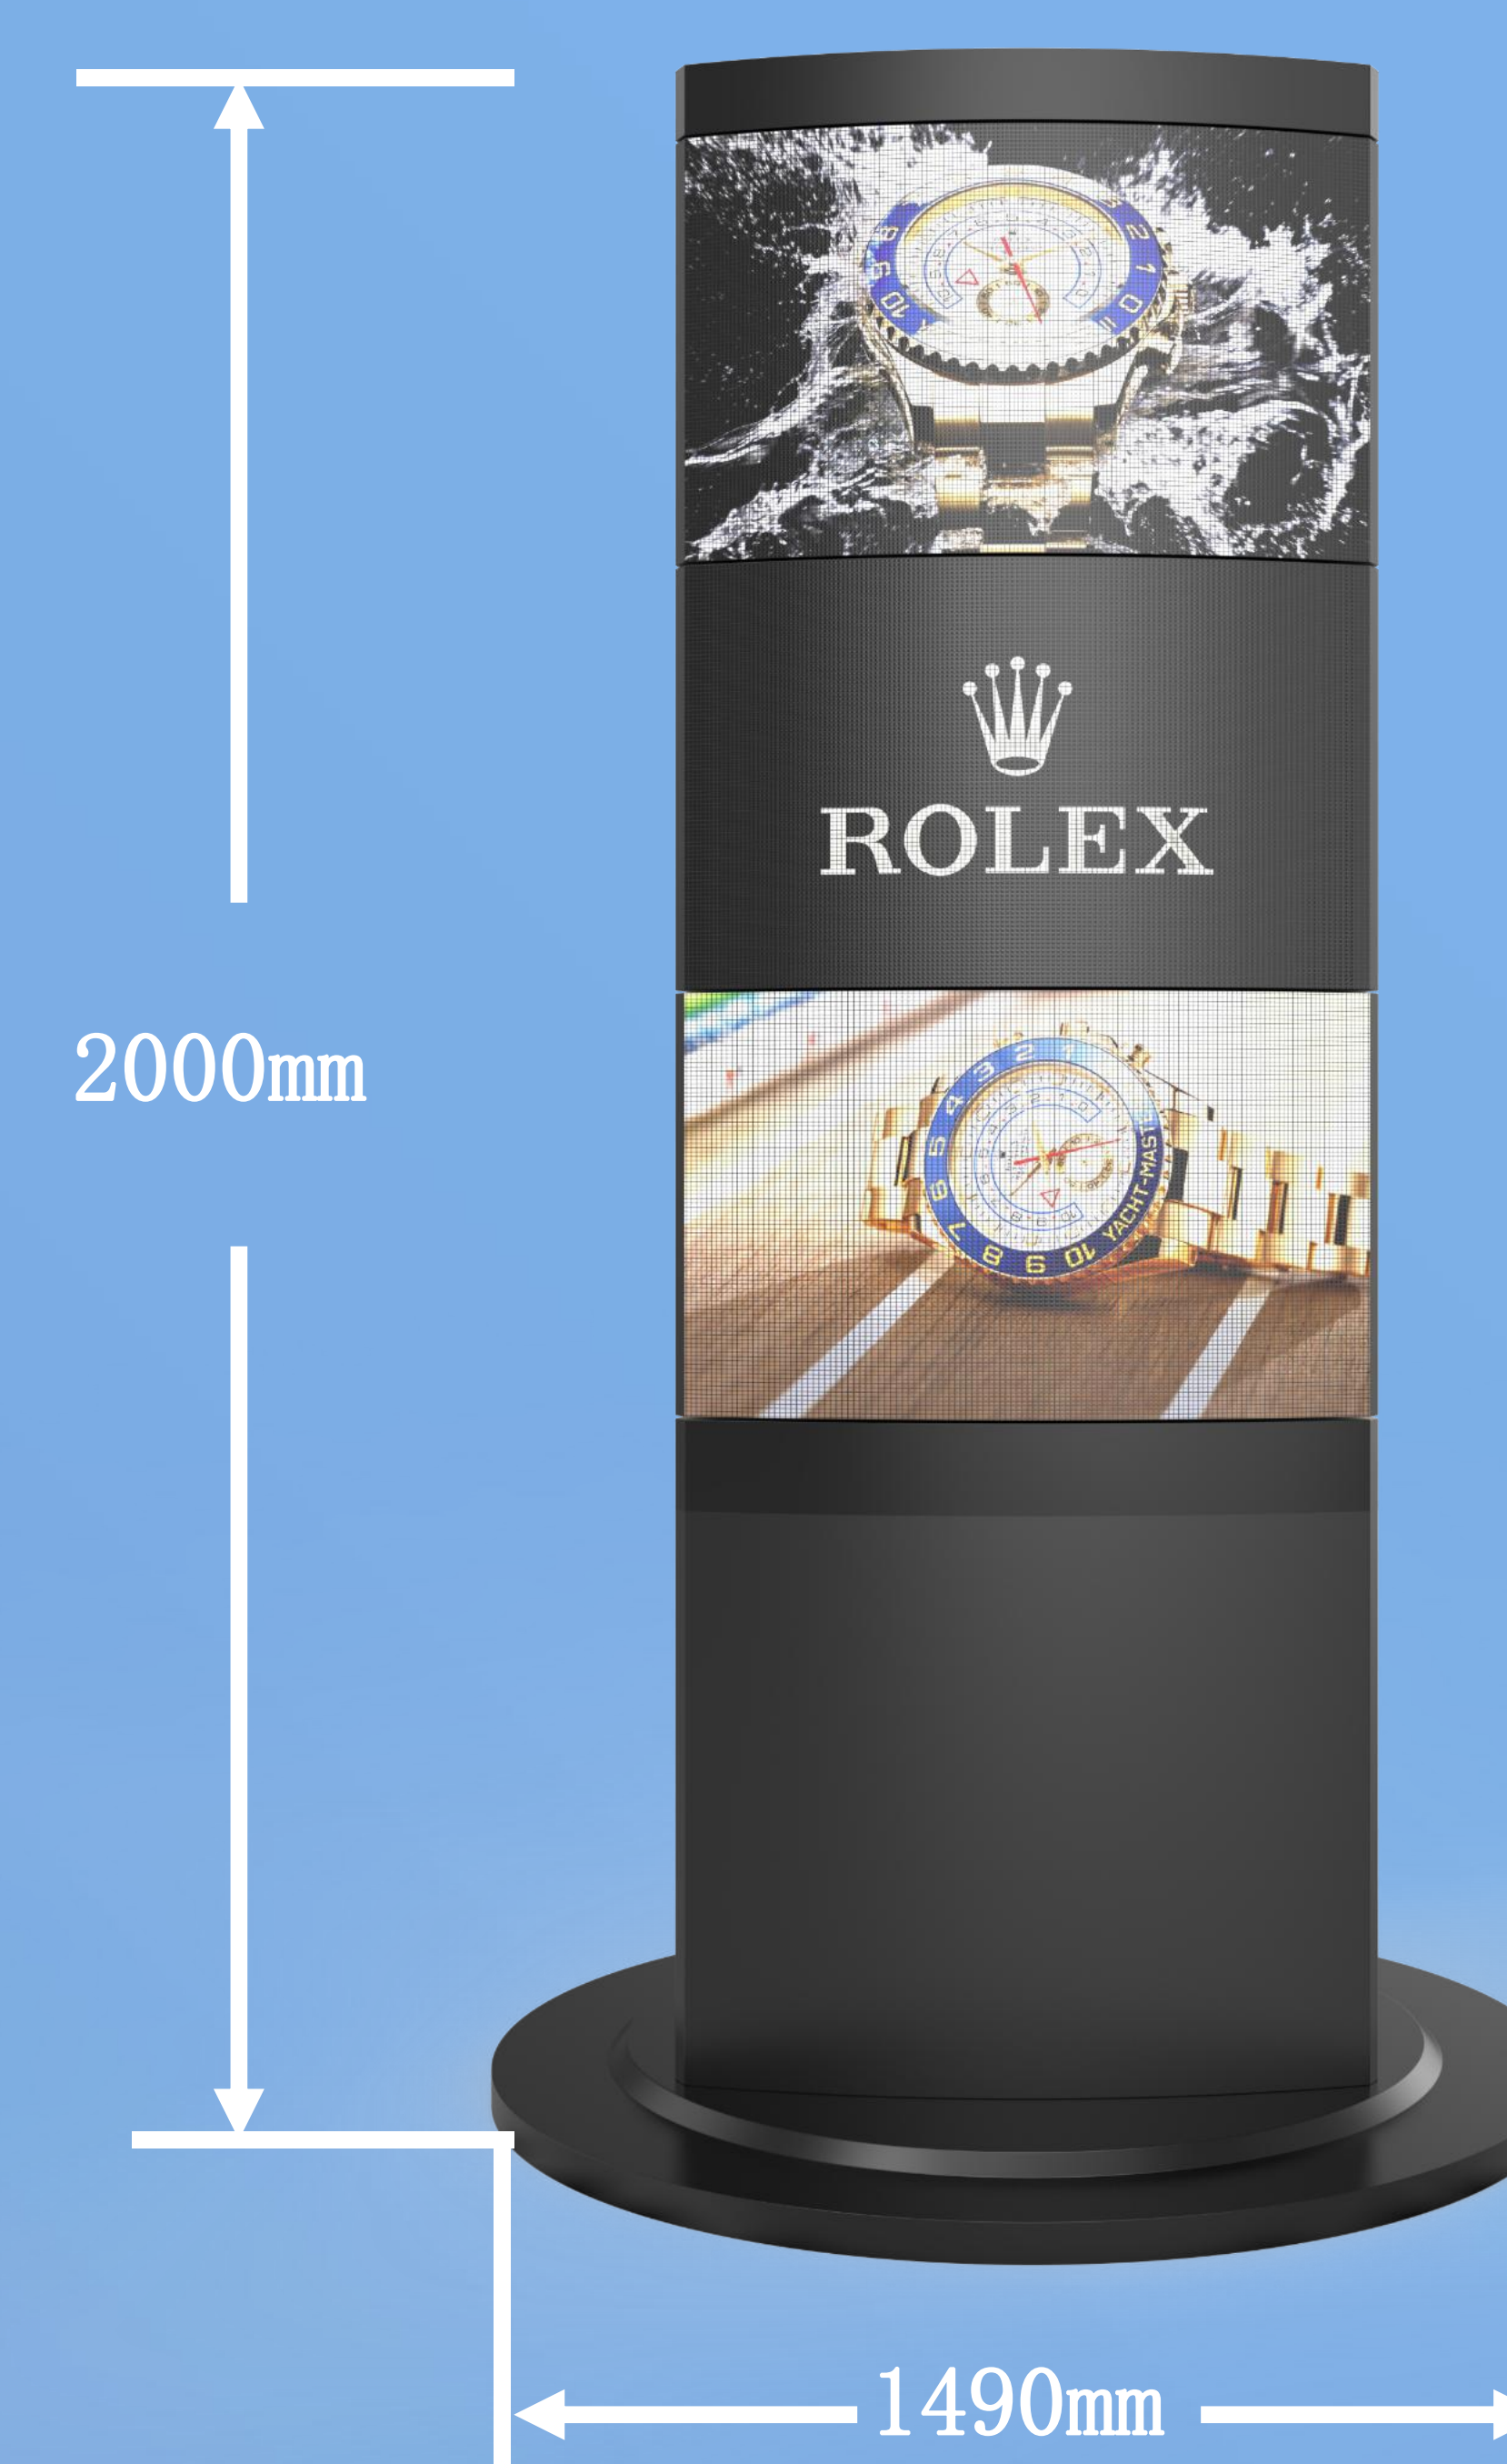

Mechanical Rotated LED Display-R93





TECHNICAL SPECIFICATIONS:

| | | |
|---------------------------|---|-------------------------|
| Pixel Pitch | P3 | |
| Display layers & faces | 9*3 | |
| LED module | 240*120mm (soft module) | 320*160mm (flat module) |
| The smallest display unit | 960*360mm | 960*320mm |
| Full display size | 2880*3240mm | 2880*2880mm |
| Resolution | 960*1080dot | 936*936dot |
| Outer size | 4390*1000mm(H*W) | |
| Contrast | 3000:1 | |
| Brightness | 1000nit | |
| Power consumption | 6.5KW/2.0KW(Max/AVE) | |
| Weight | 1750kg | |
| Refresh rate | 3840Hz | |
| IP level | IP30 | |
| Product Color | Black | |
| Control Method | Remote App | |
| Rotate mode | 8 modes from positive and negative rotation, cross, semi-synchronous, synchronous | |
| Rotate speed | Customized | |
| Menu language | Chinese/English (Multiple language support) | |
| Warranty | 2 Years | |


PRODUCT FEATURES:

- Mobile phone APP smart control to manage play list and content.
- 9 layers 3 faces display, multi type rotation modes.
- Noise-free moto driving, quiet movement, stable operation .
- Modular design part, friendly installation.
- Synchronous videos and picture automatically fit the rotation.
- Broadly use in super market, store, club, subway, hotel, train and bus station, airport, etc.

PRODUCT PICTURES:

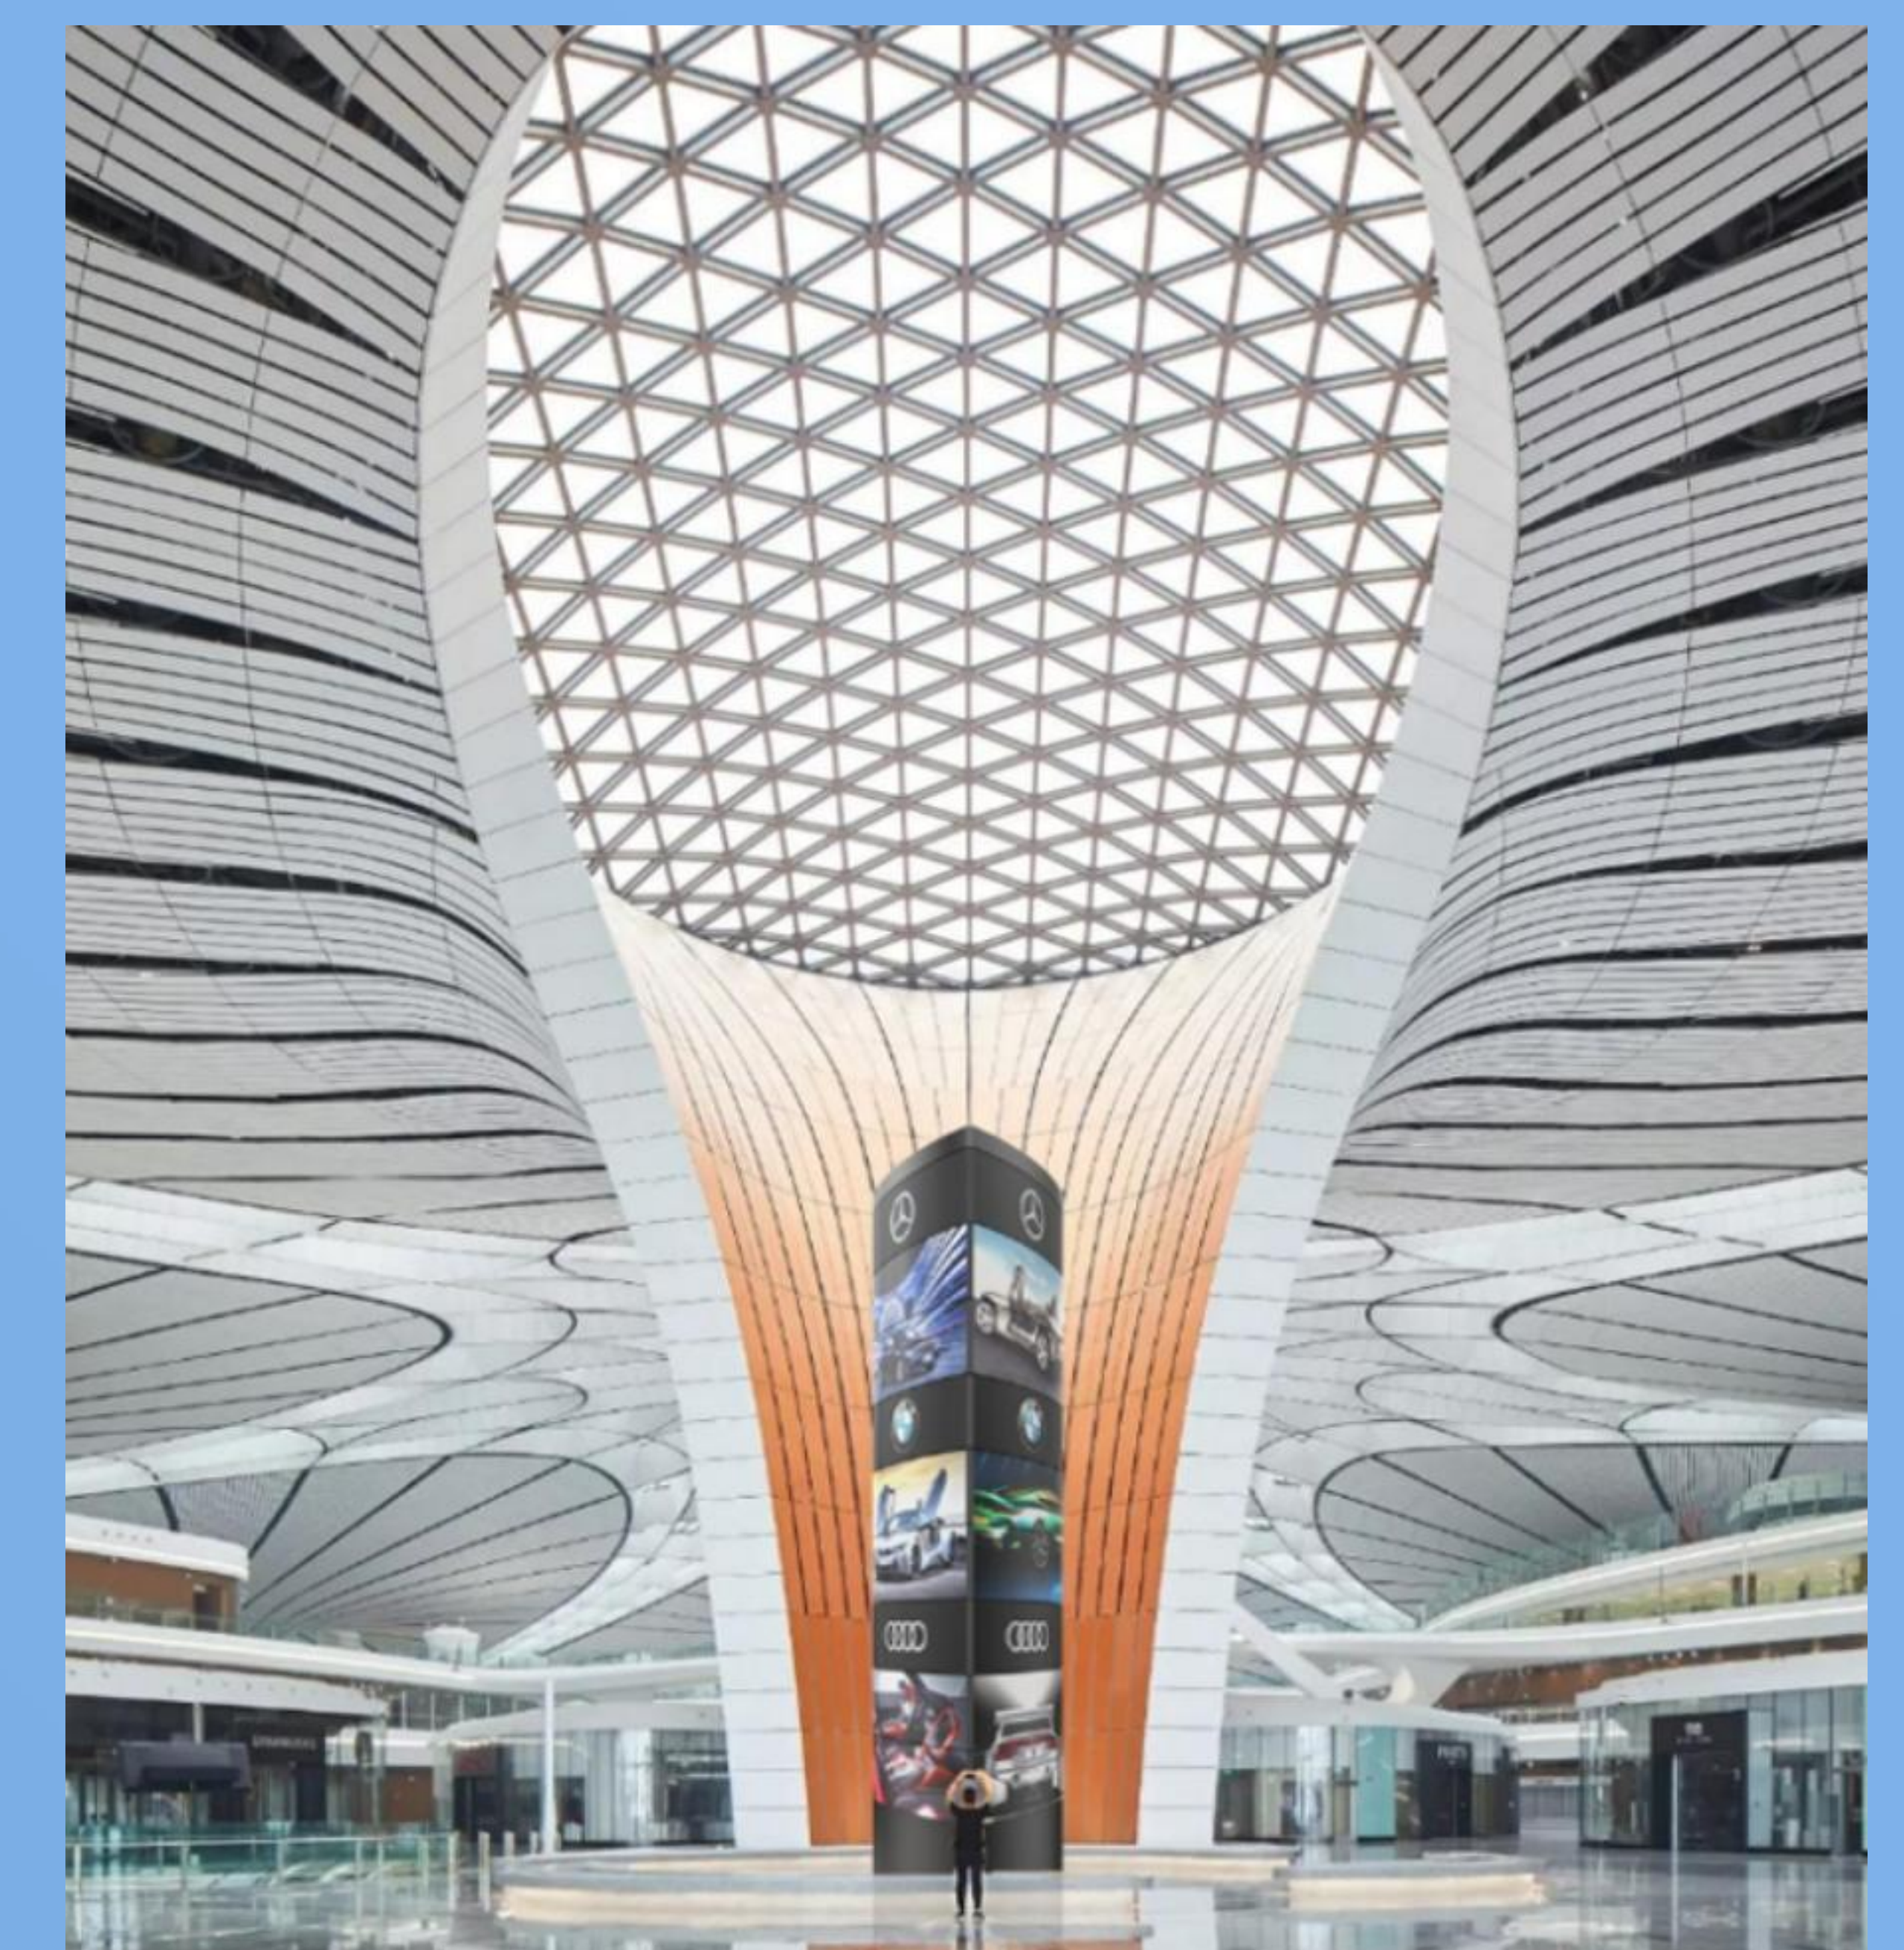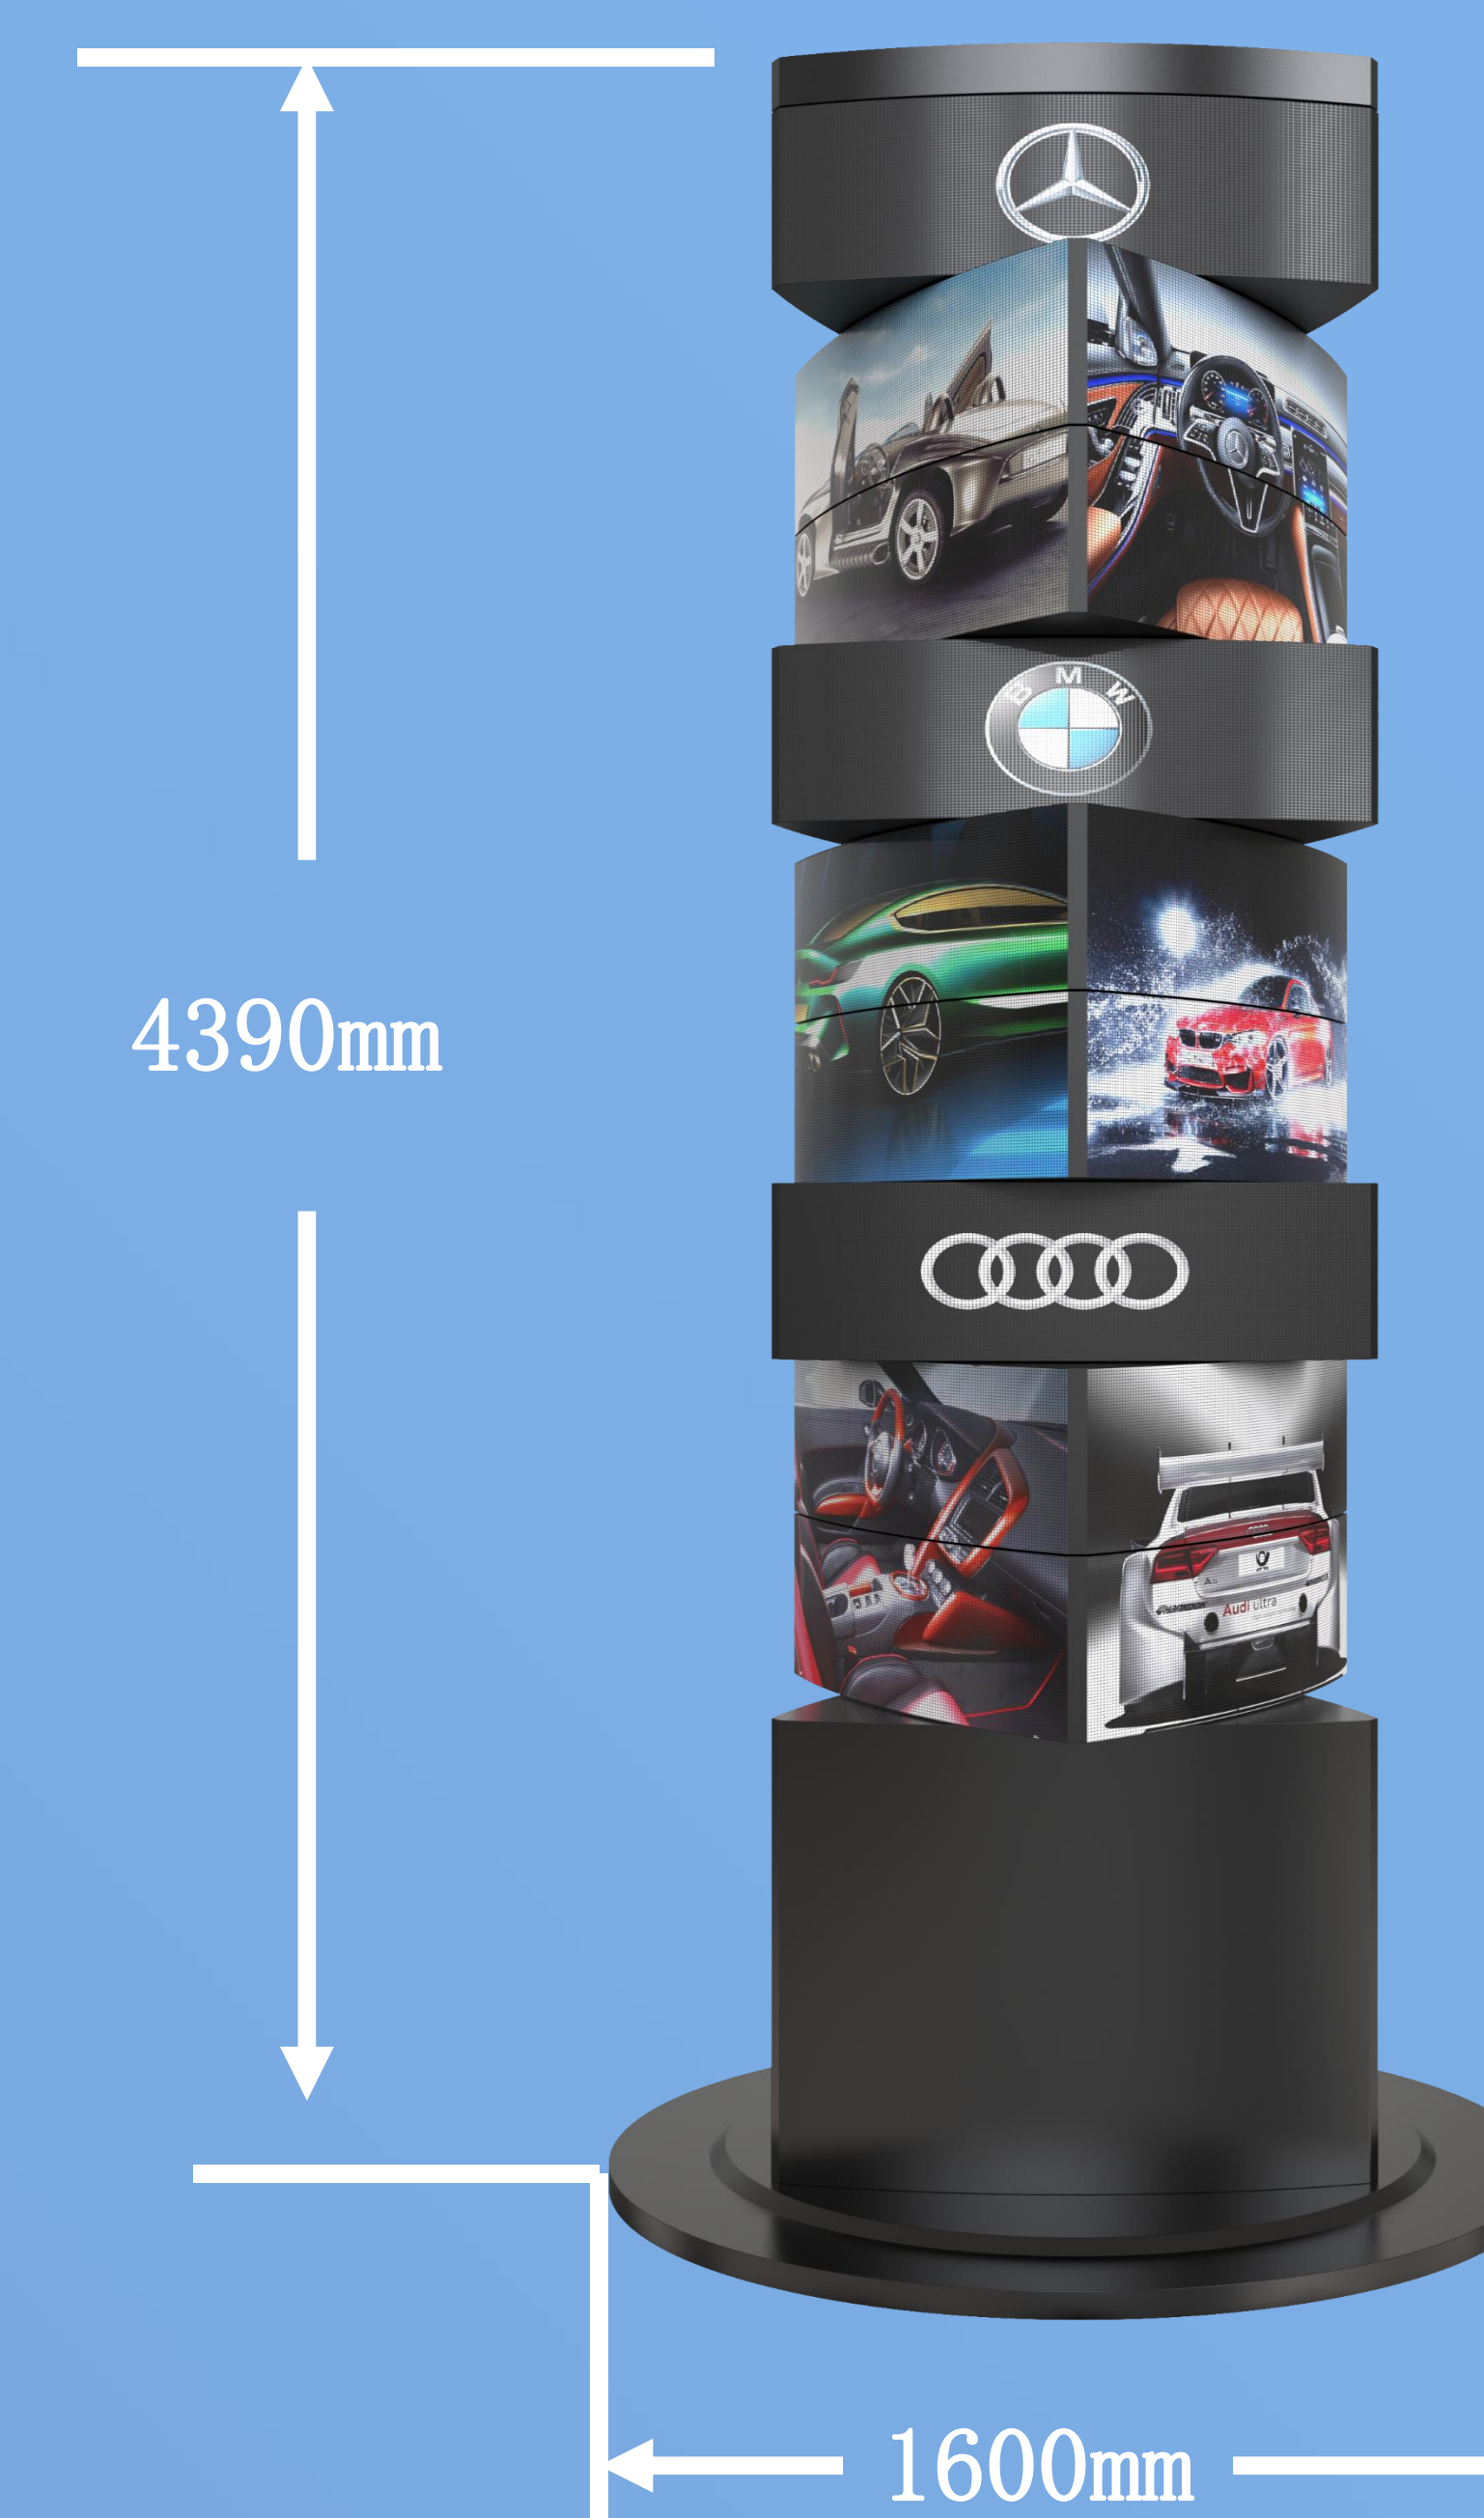

Mechanical Rotated LED Display-RT34

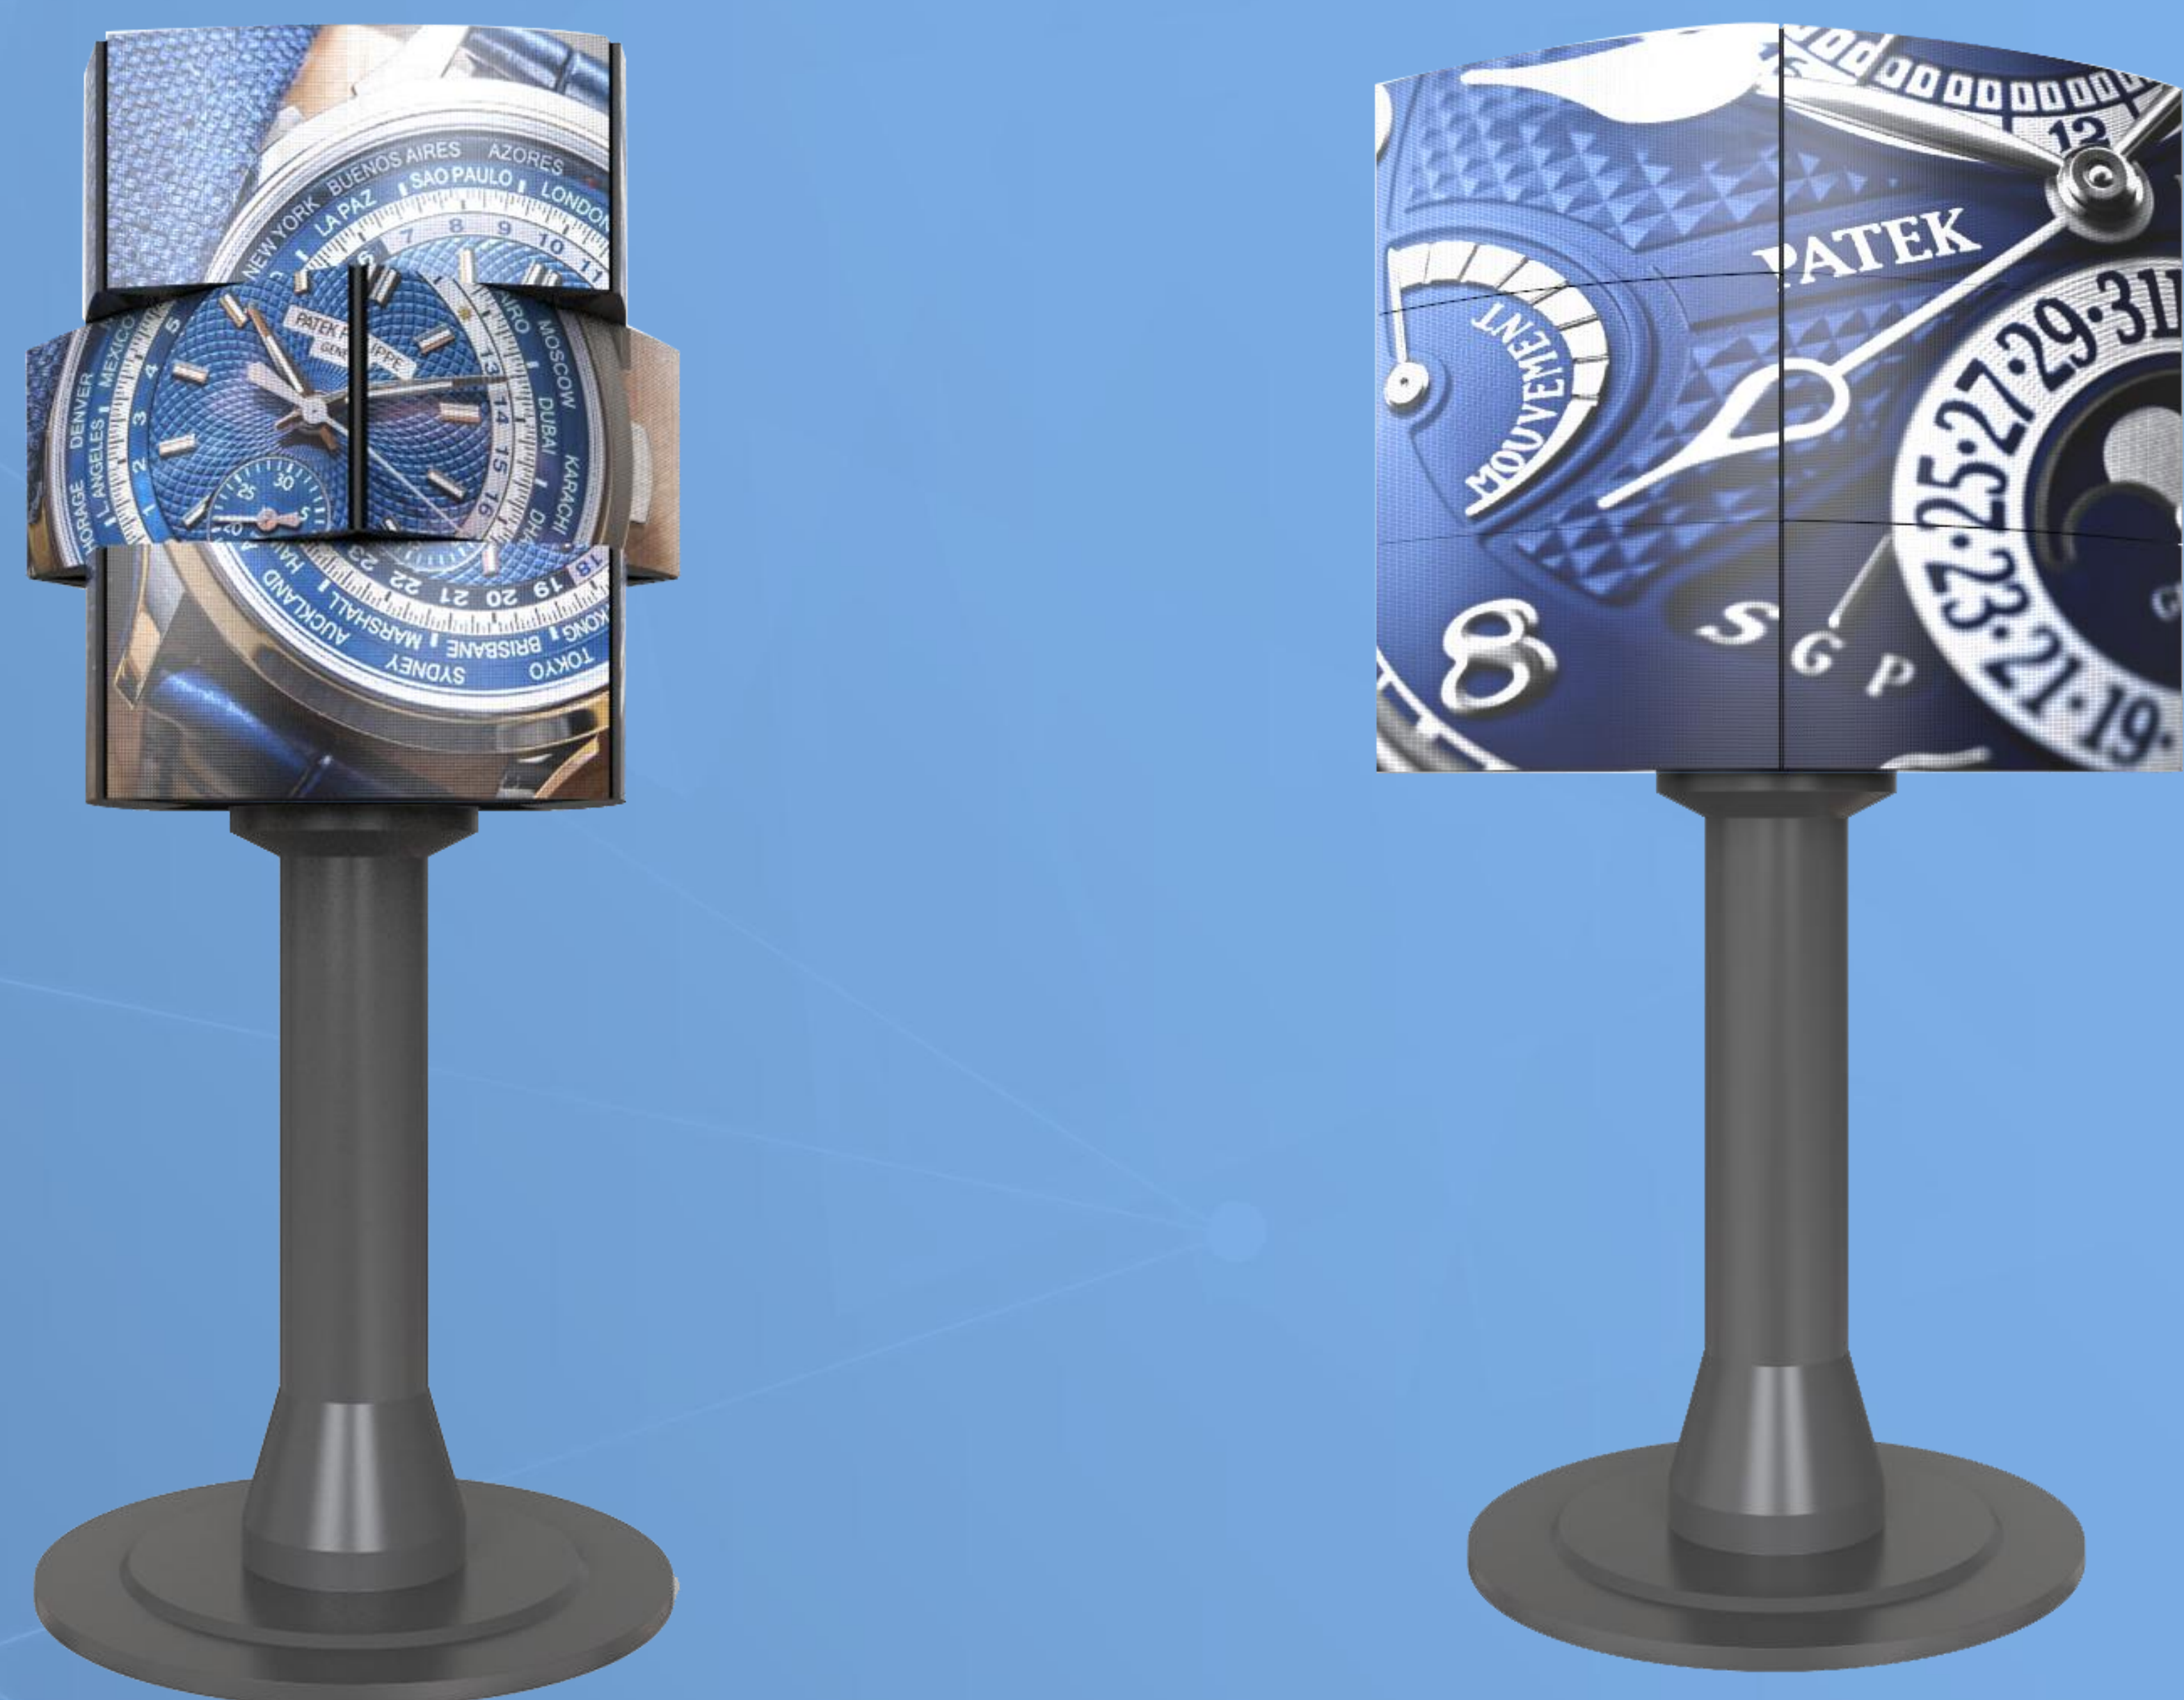



PRODUCT FEATURES:

- Mobile phone APP smart control to manage play list and content.
- 3 layers 4 faces display, multi type rotation modes. Transform between 4sides and two sides
- Noise-free moto driving, quiet movement .
- Modular design part, friendly installation.
- Synchronous videos and picture automatically fit the rotation.
- Broadly use in super market, store, club, subway, hotel, train and bus station, airport, etc.

TECHNICAL SPECIFICATIONS:

| | | |
|---------------------------|---|----------------|
| Pixel Pitch | P3 | |
| Display layers & sides | 3*4 | |
| LED module | 240*120mm Flexible | 320*160mm Flat |
| The smallest display unit | 1200*540mm | 1280*800mm |
| Full display size | 4800*2160mm | 5120*2400mm |
| Resolution (Dot) | 1600*720 | 1664*780 |
| Outer size | 4500*1200mm(H*W)/4500*2400mm(H*W) | |
| Contrast | 3000:1 | |
| Brightness | 1000nit | |
| Power consumption | 10.5KW/3.5KW(Max/AVE) | |
| Weight | 2265kg | |
| Refresh rate | 3840Hz | |
| IP level | IP30 | |
| Product Color | Black | |
| Control Method | Remote App | |
| Rotate mode | 8 modes from positive and negative rotation, cross, semi-synchronous, synchronous | |
| Rotate speed | Customized | |
| Menu language | Chinese/English (Multiple language support) | |
| Warranty | 2 Years | |

PRODUCT PICTURES:

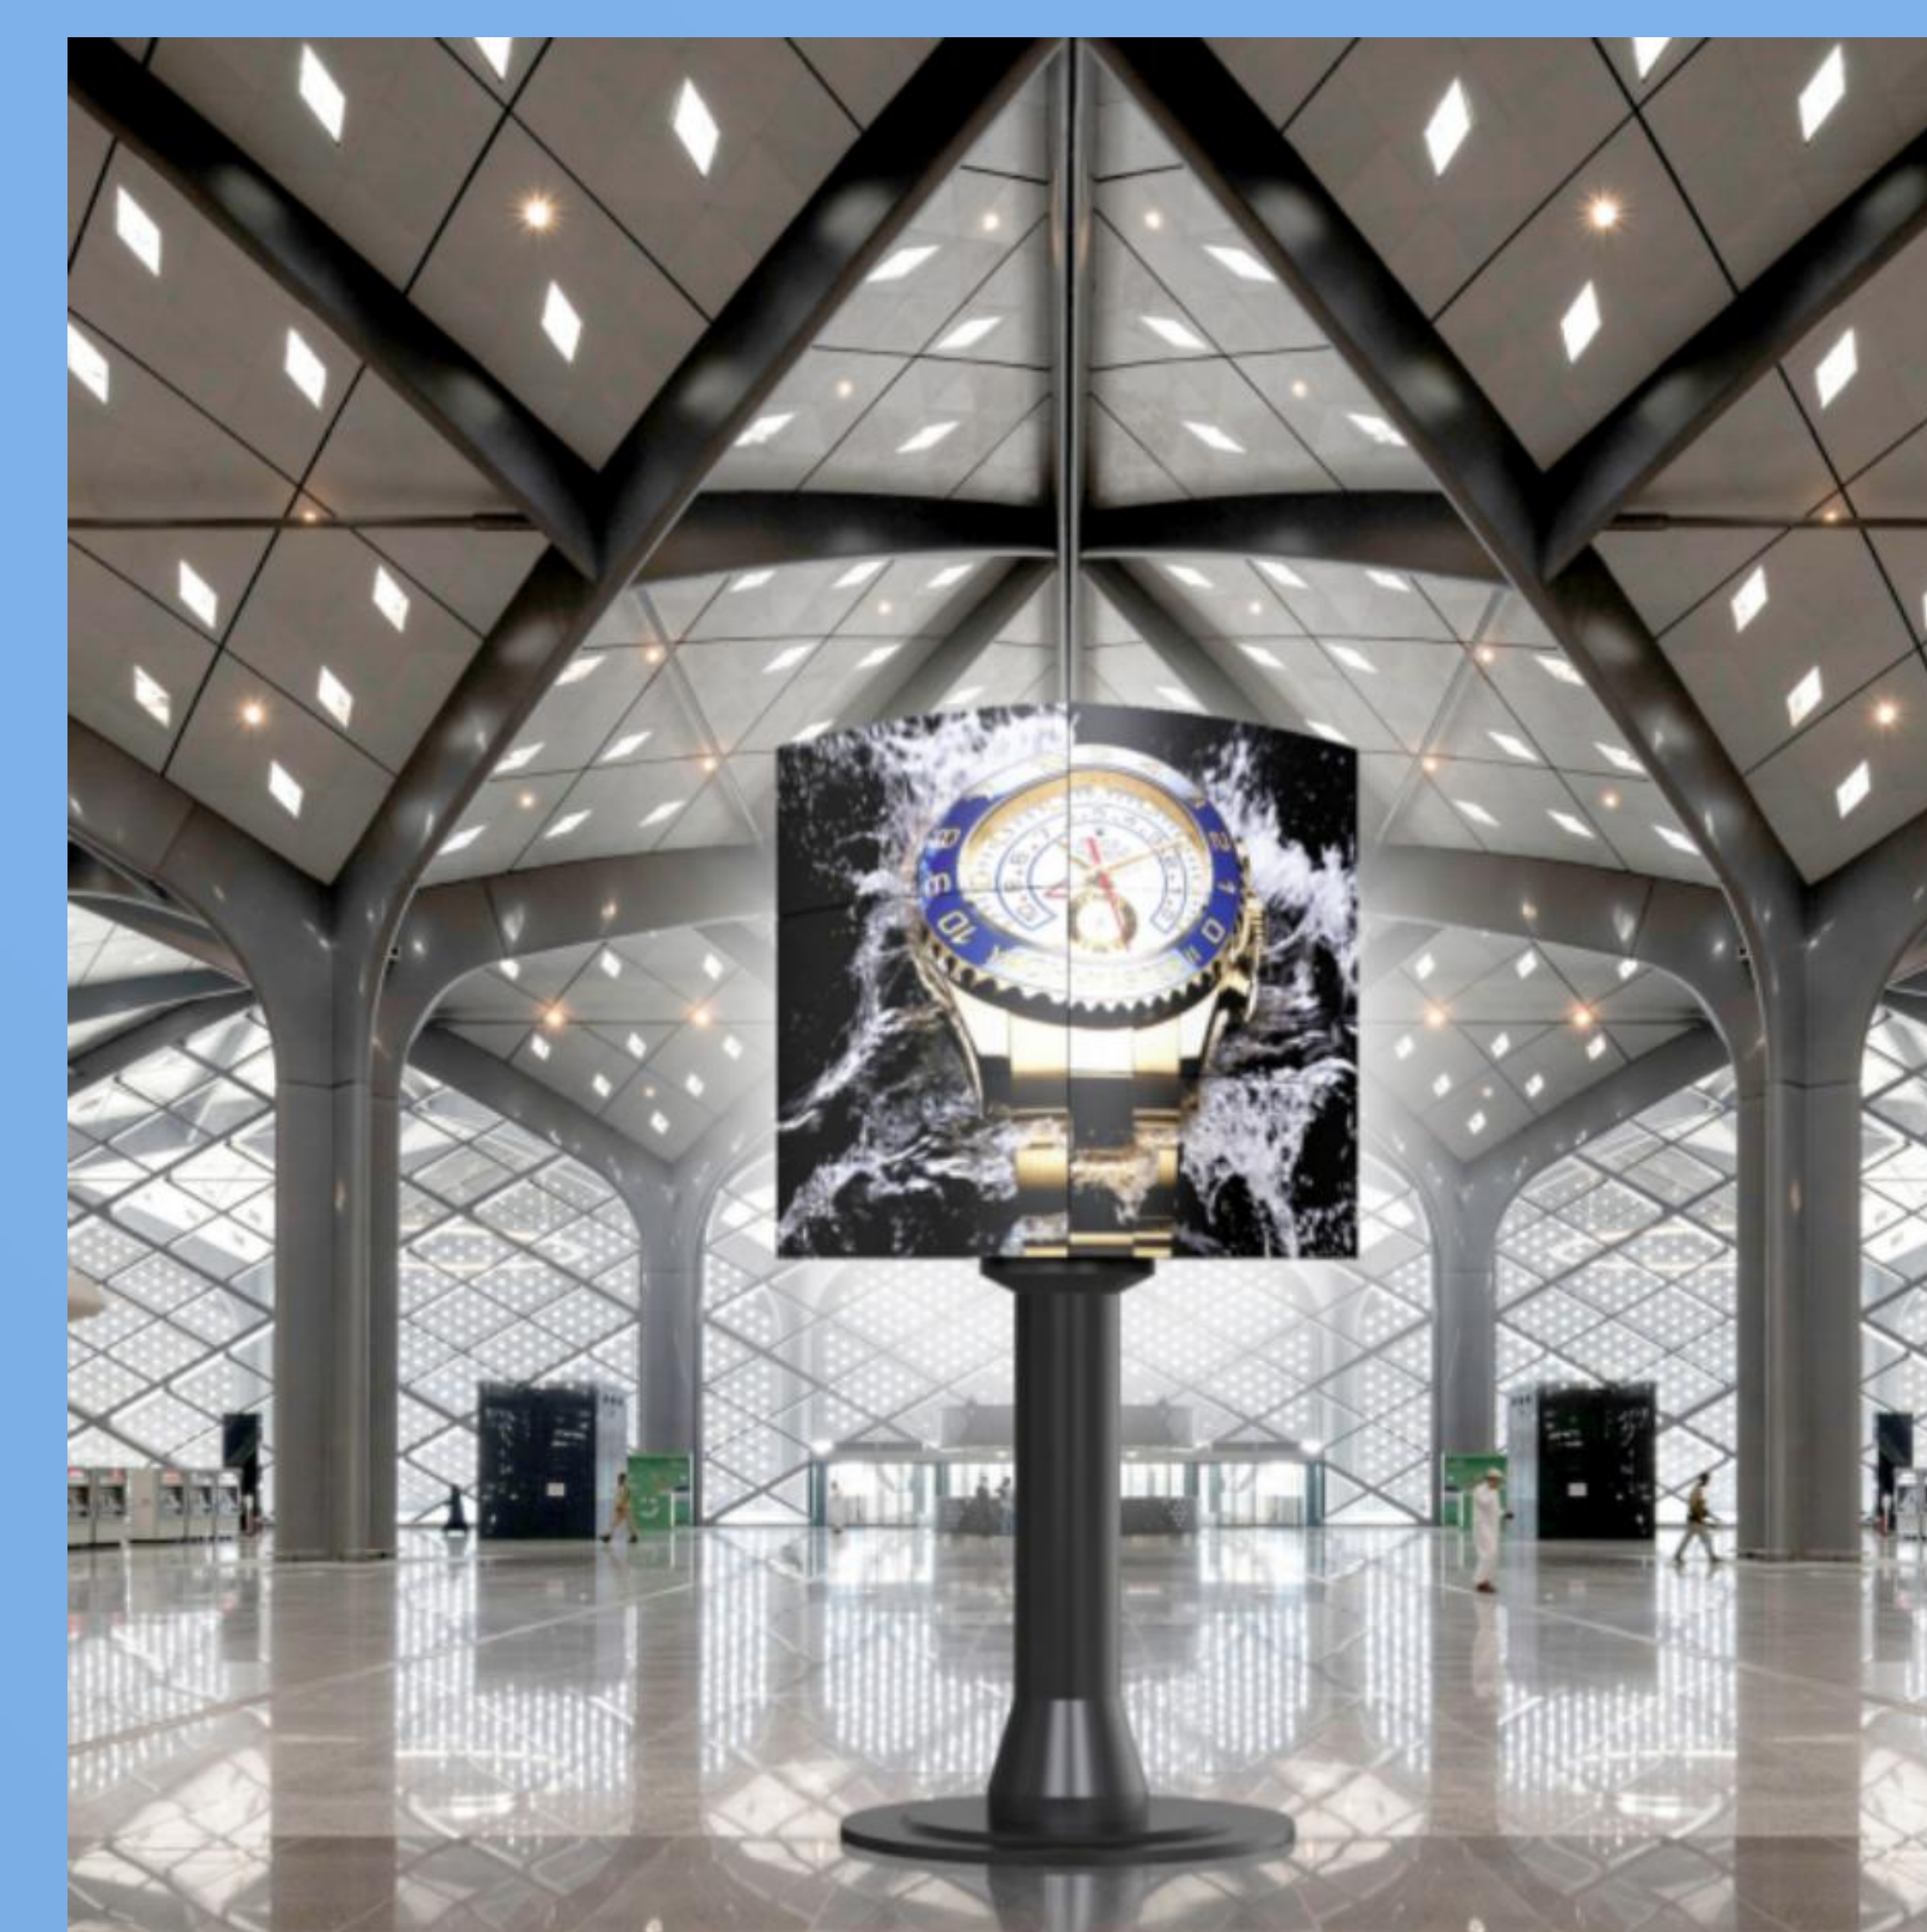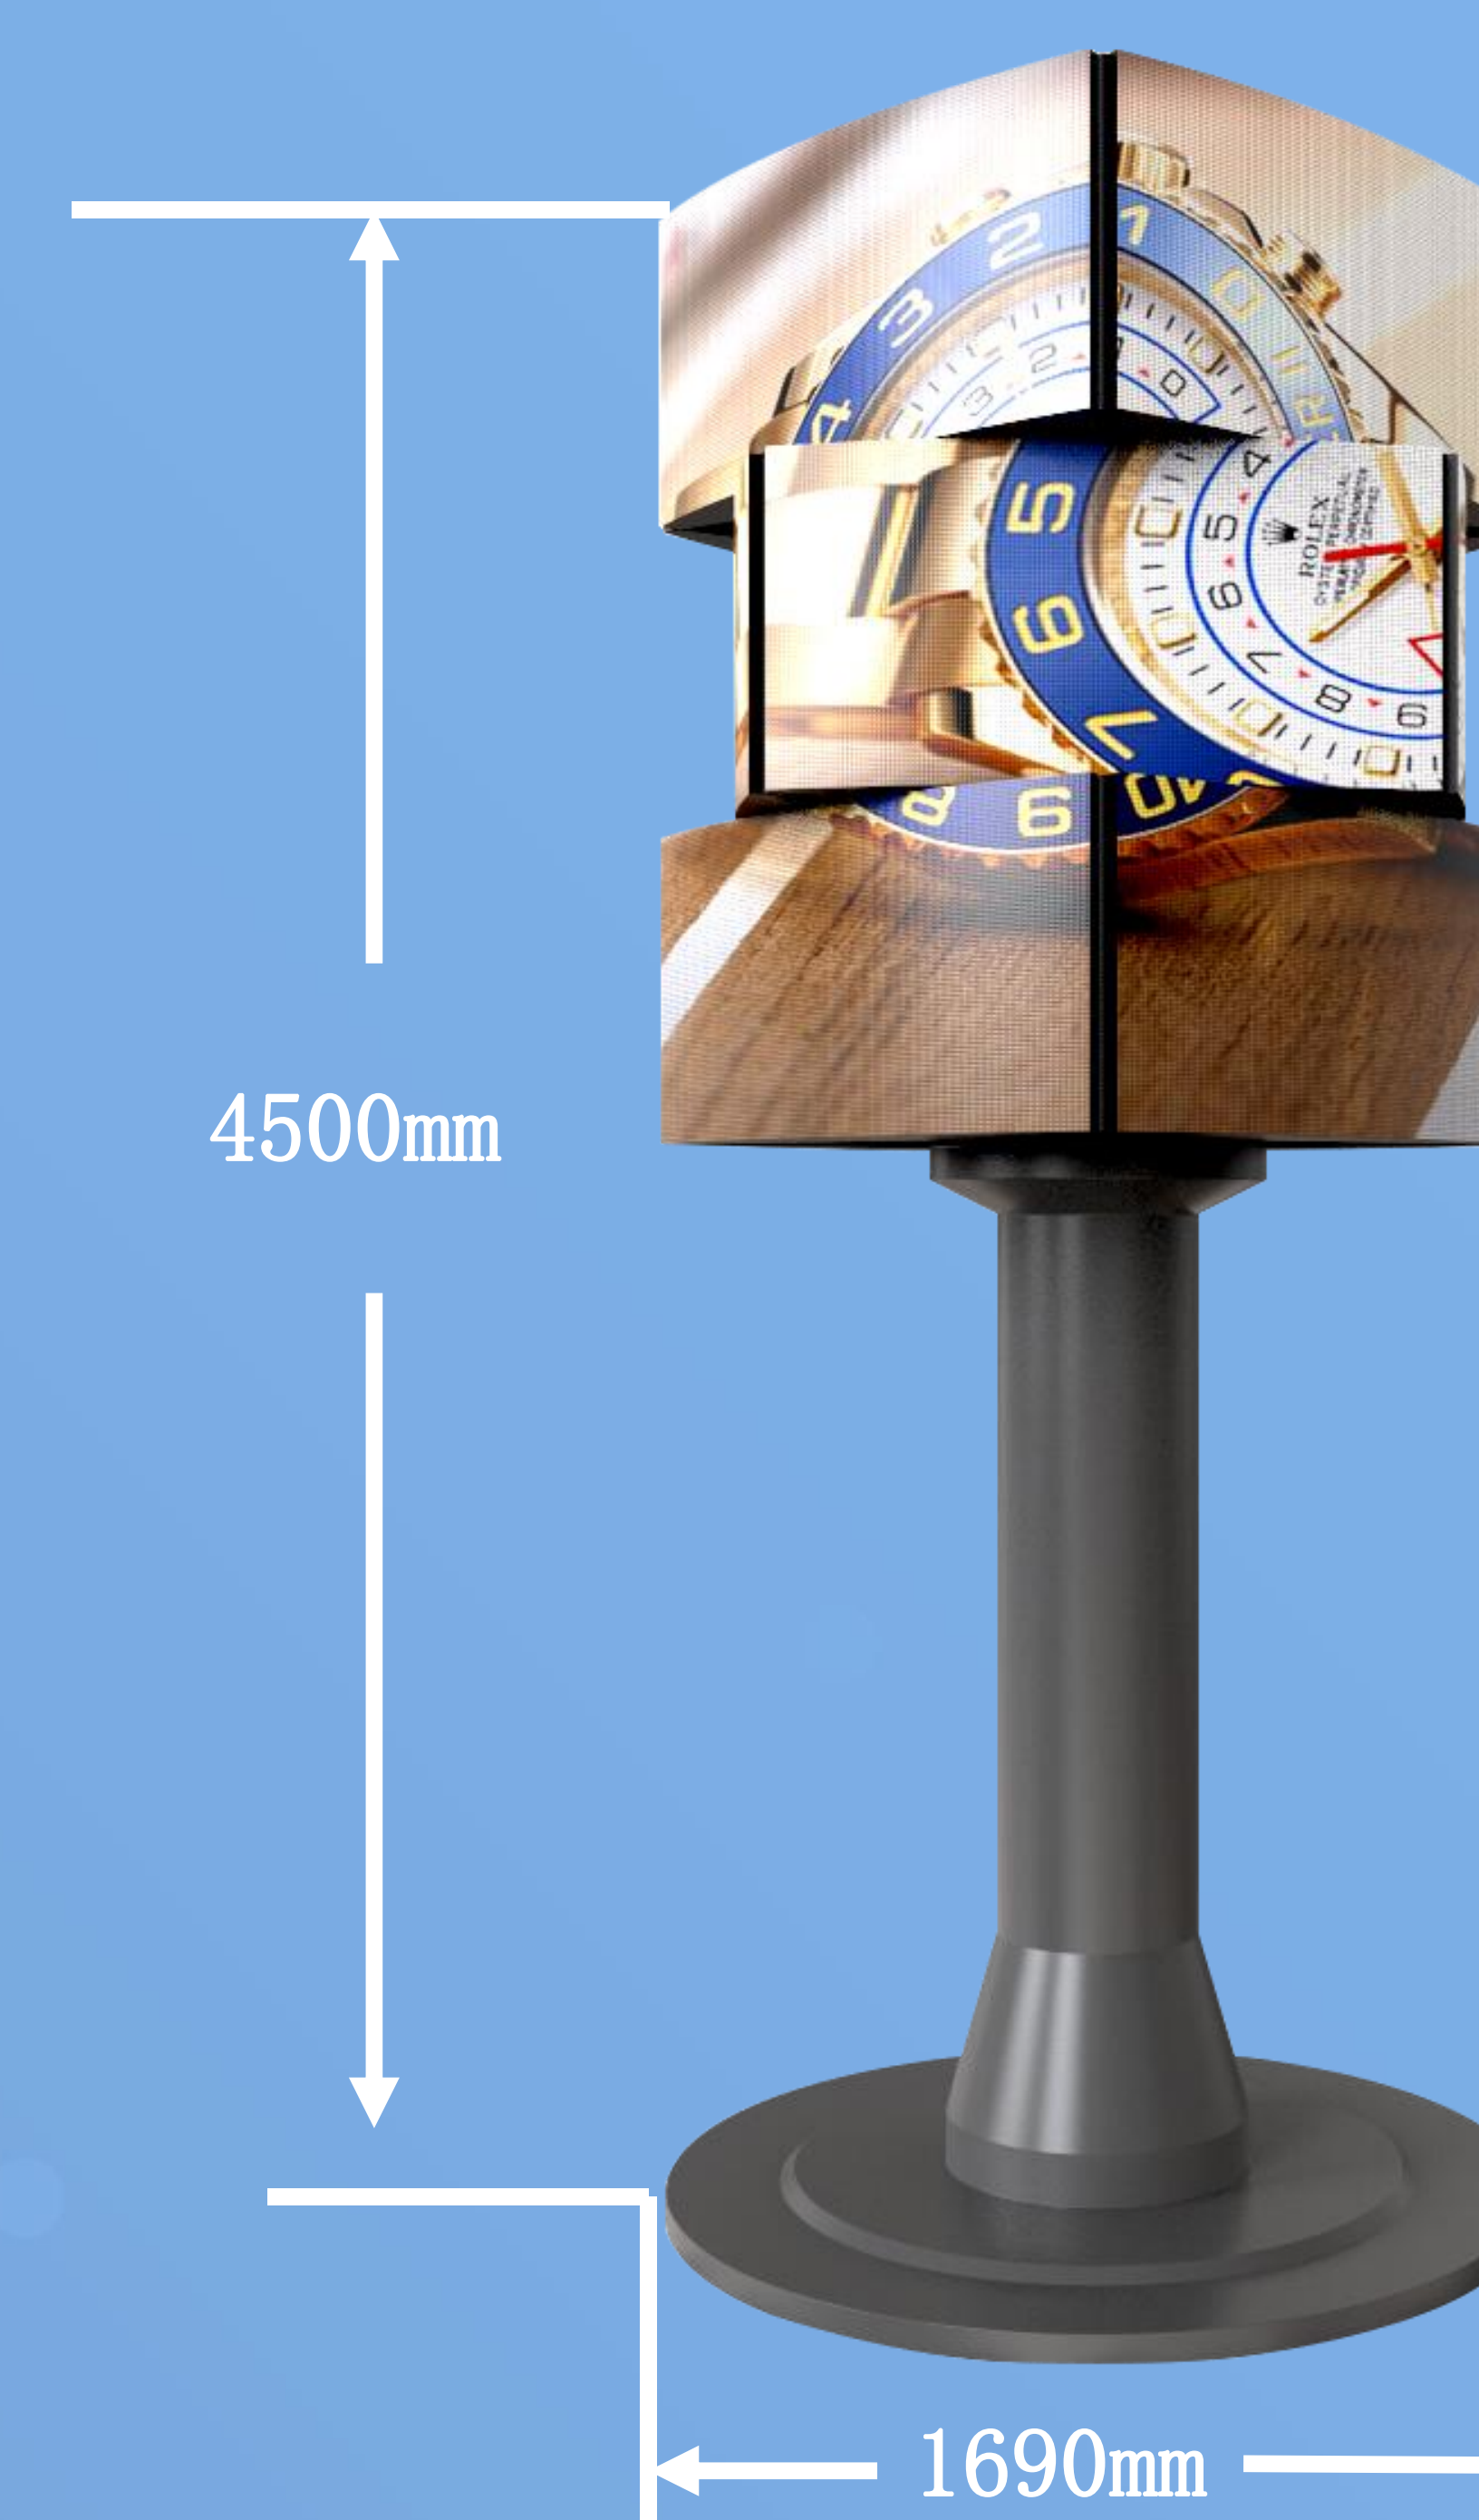

Mechanical Rotated LED display-Rmini




TECHNICAL SPECIFICATIONS:

| | | | | |
|---------------------------|---|------------|-------------------------|-------------|
| Pixel Pitch | P2 | | | |
| Display layers & faces | 3*3 | 3*4 | 3*3 | 3*4 |
| LED module | 240*120mm (soft module) | | 256*128mm (flat module) | |
| The smallest display unit | 480*240mm | | 512*256mm | |
| Full display size | 1440*720mm | 1920*720mm | 1536*768mm | 2048*768mm |
| Resolution | 720*360dot | 960*360dot | 768*384dot | 1024*384dot |
| Outer size | 1600*500mm(H*W) | | | |
| Contrast | 3000:1 | | | |
| Brightness | 1000nit | | | |
| Power consumption | 0.9KW/0.3KW(Max/AVE) | | | |
| Weight | 115kg/145kg | | | |
| Refresh rate | 3840Hz | | | |
| IP level | IP30 | | | |
| Product Color | Black | | | |
| Control Method | Remote App | | | |
| Rotate mode | 8 modes from positive and negative rotation, cross, semi-synchronous, synchronous | | | |
| Rotate speed | Customized | | | |
| Menu language | Chinese/English (Multiple language support) | | | |
| Warranty | 2 Years | | | |

PRODUCT FEATURES:

- Mobile phone APP smart control to manage play list and content.
- 3 layers display, multi type rotation modes.
- Noise-free moto driving, quiet movement .
- Modular design part, friendly installation.
- Synchronous videos and picture automatically fit the rotation.
- Broadly use in super market, store, club, subway, hotel, train and bus station, airport, etc.

PRODUCT PICTURES:

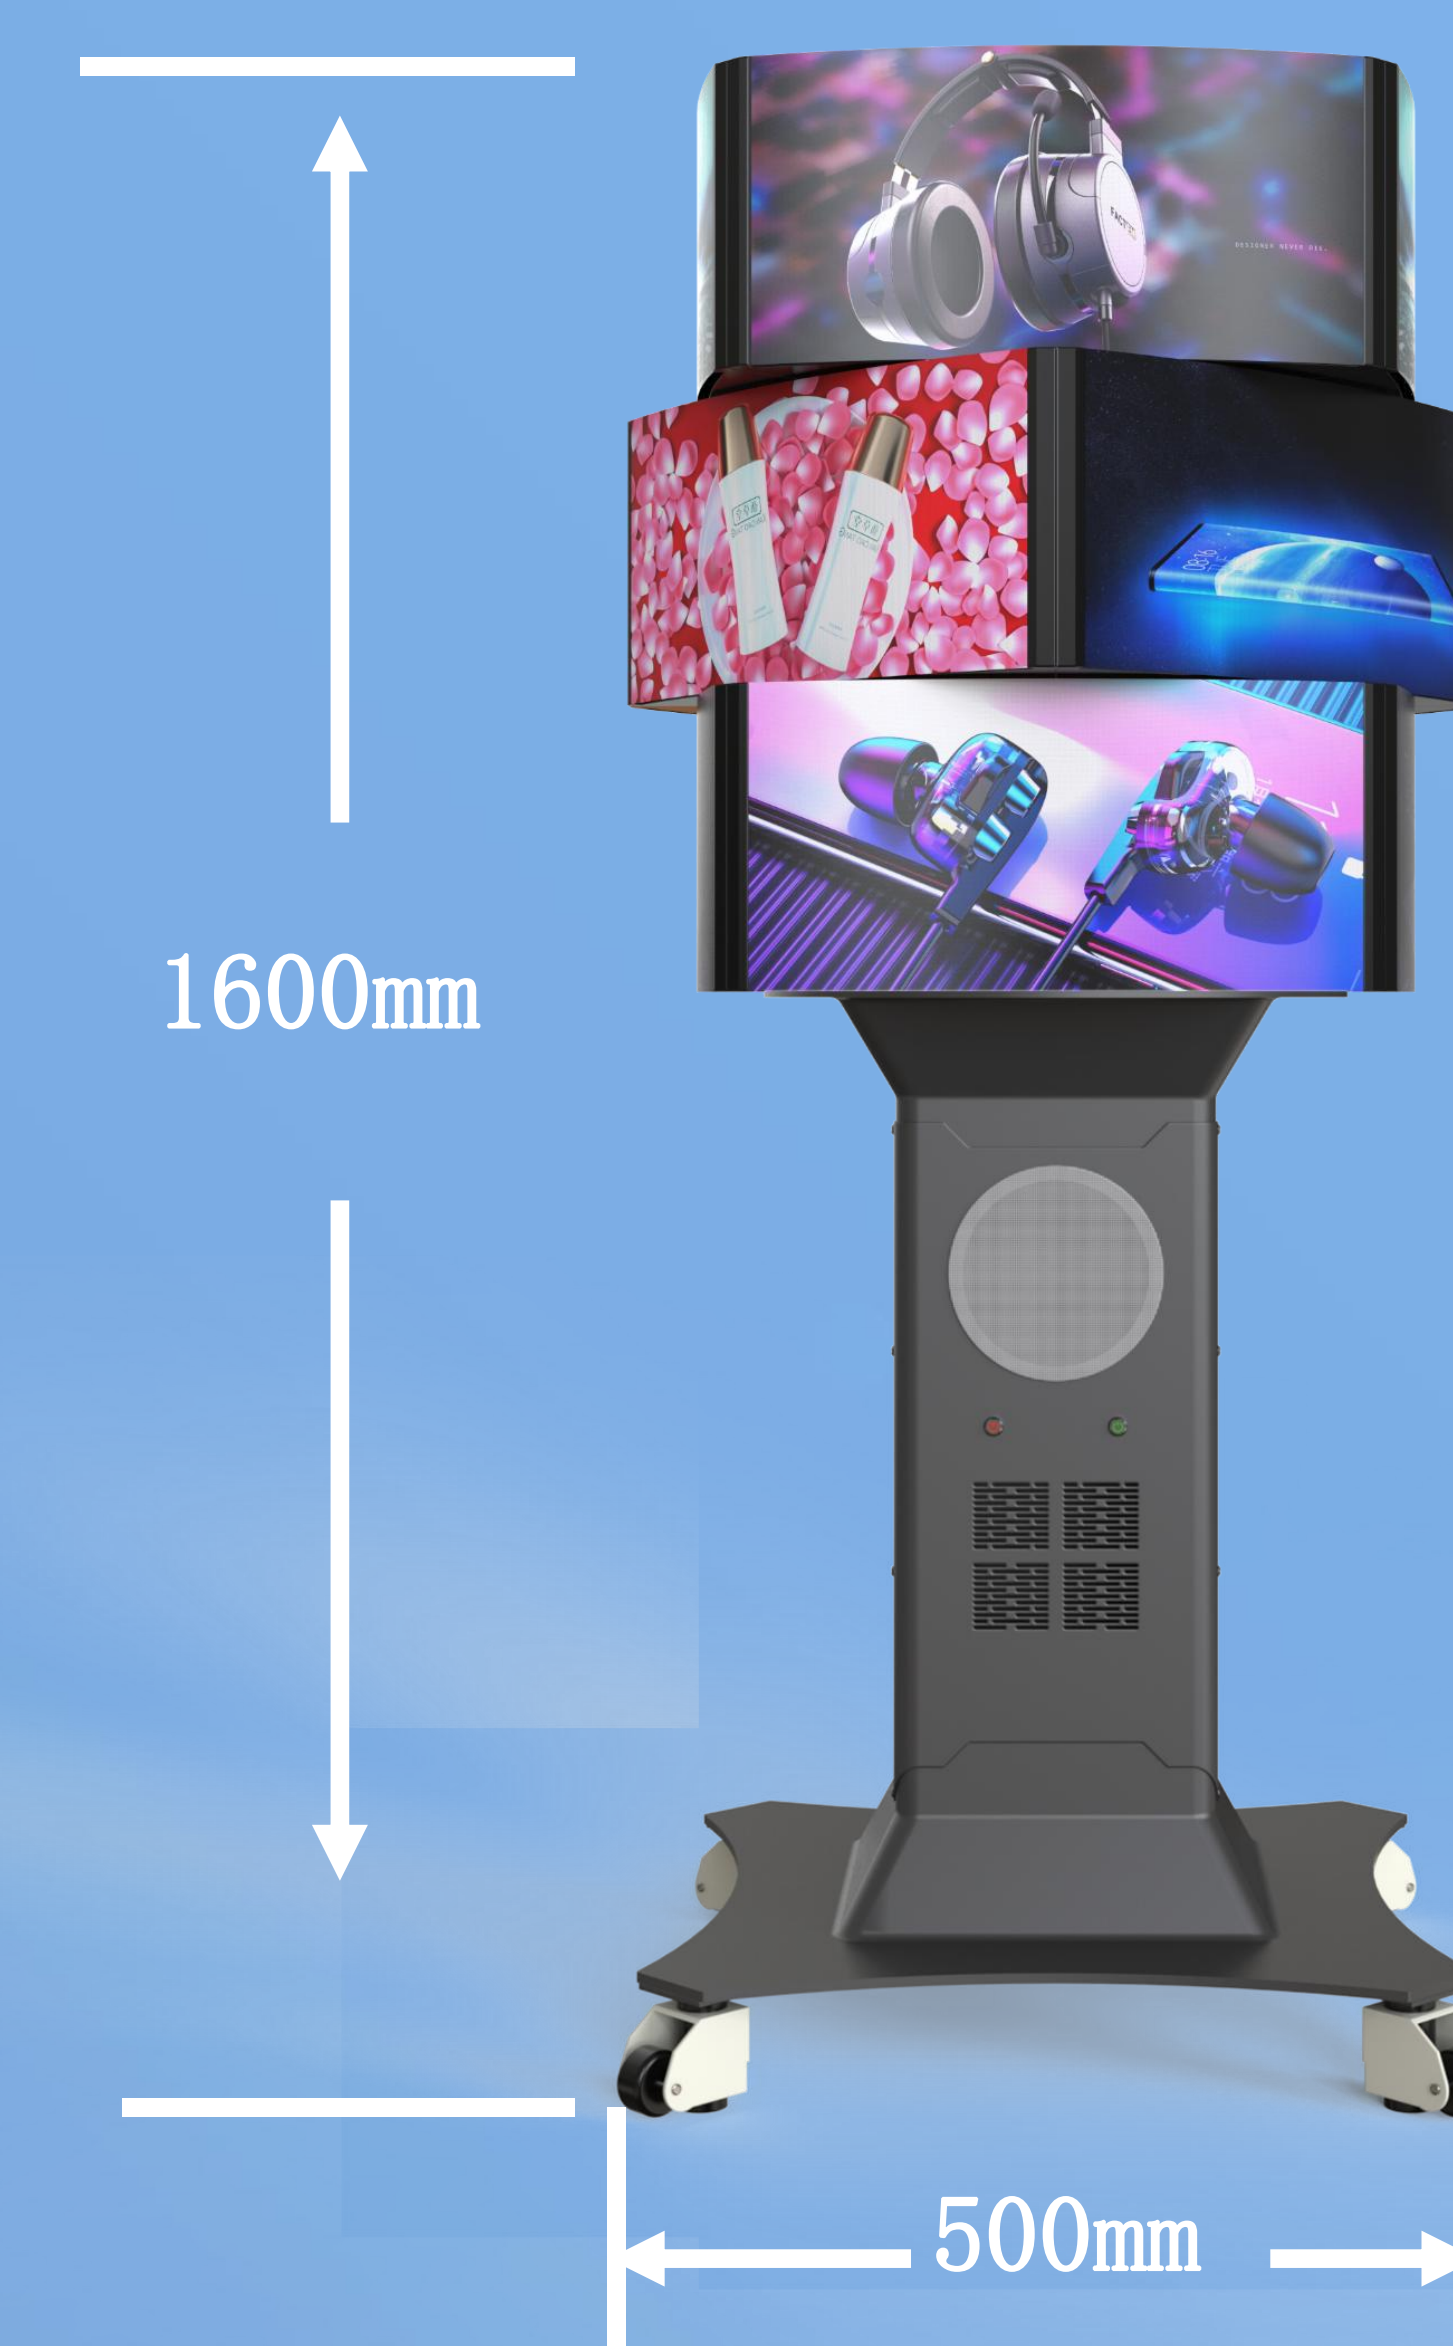

Mechanical Rotated LED Display-Rcube



PRODUCT FEATURES:

- Mobile phone APP smart control to manage play list and content.
- 3 layers display, multi type rotation modes.
- Noise-free moto driving, quiet movement .
- Modular design part, friendly installation.
- Synchronous videos and picture automatically fit the rotation.
- Broadly use in super market, store, club, subway, hotel, train and bus station, airport, etc.

TECHNICAL SPECIFICATIONS:

| Pixel Pitch | P3 | | P4 | |
|---------------------------|---|------------|-------------------------|------------|
| Display layers & faces | 3*3 | 3*4 | 3*3 | 3*4 |
| LED module | 320*160mm (flat module) | | 320*320mm (flat module) | |
| The smallest display unit | 1280*320mm | 960*320mm | 1280*320mm | 960*320mm |
| Full display size | 3840*960mm | 3840*960mm | 3840*960mm | 3840*960mm |
| Resolution | 320*960dot | 320*640dot | 320*960dot | 320*640dot |
| Outer size | 2990*1025mm(H*W) | | | |
| Contrast | 3000:1 | | | |
| Brightness | 1000nit / 4000nit | | | |
| Power consumption | 3.8-4.7KW(Max) | | | |
| Weight | 520kg | | | |
| Refresh rate | 3840Hz | | | |
| IP level | IP30/IP65 | | | |
| Product Color | Black | | | |
| Control Method | Remote App | | | |
| Rotate mode | 8 modes from positive and negative rotation, cross, semi-synchronous, synchronous | | | |
| Rotate speed | Customized | | | |
| Menu language | Chinese/English (Multiple language support) | | | |
| Warranty | 2 Years | | | |

PRODUCT PICTURES:

